

# Vehicle-Bridge Interaction Simulation and Damage Identification of a Bridge Using Responses Measured in a Passing Vehicle by Empirical Mode Decomposition Method

Shohel Rana<sup>1</sup>, Md. Rifat Zaman<sup>2\*</sup>, Md. Ibrahim Islam Ifty<sup>2</sup>, Seyedali Mirmotalebi<sup>3\*</sup>, Tahsin Tareque<sup>4</sup>

<sup>1</sup>Department of Civil Engineering, Bangladesh University of Engineering and Technology, Dhaka, Bangladesh

<sup>2</sup>Department of Civil Engineering, Atish Dipankar University of Science & Technology, Dhaka, Bangladesh

<sup>3</sup>Department of Civil, Architectural, and Environmental Engineering, North Carolina Agricultural and Technical State University, Greensboro, North Carolina, USA

<sup>4</sup>Department of Civil Engineering, University of Texas Rio Grande Valley, Edinburg, Texas, USA

Email: \*rifatzaman179@gmail.com, \*smirmotalebi@aggies.ncat.edu

**How to cite this paper:** Rana, S., Zaman, Md.R., Ifty, Md.I.I., Mirmotalebi, S. and Tareque, T. (2023) Vehicle-Bridge Interaction Simulation and Damage Identification of a Bridge Using Responses Measured in a Passing Vehicle by Empirical Mode Decomposition Method. *Open Journal of Civil Engineering*, 13, 742-755.

<https://doi.org/10.4236/ojce.2023.134049>

**Received:** November 24, 2023

**Accepted:** December 25, 2023

**Published:** December 28, 2023

Copyright © 2023 by author(s) and Scientific Research Publishing Inc. This work is licensed under the Creative Commons Attribution International License (CC BY 4.0).

<http://creativecommons.org/licenses/by/4.0/>



Open Access

## Abstract

To prevent early bridge failures, effective Structural Health Monitoring (SHM) is vital. Vibration-based damage assessment is a powerful tool in this regard, as it relies on changes in a structure's dynamic characteristics as it degrades. By measuring the vibration response of a bridge due to passing vehicles, this approach can identify potential structural damage. This dissertation introduces a novel technique grounded in Vehicle-Bridge Interaction (VBI) to evaluate bridge health. It aims to detect damage by analyzing the response of passing vehicles, taking into account VBI. The theoretical foundation of this method begins with representing the bridge's superstructure using a Finite Element Model and employing a half-car dynamic model to simulate the vehicle with suspension. Two sets of motion equations, one for the bridge and one for the vehicle are generated using the Finite Element Method, mode superposition, and D'Alembert's principle. The combined dynamics are solved using the Newmark-beta method, accounting for road surface roughness. A new approach for damage identification based on the response of passing vehicles is proposed. The response is theoretically composed of vehicle frequency, bridge natural frequency, and a pseudo-frequency component related to vehicle speed. The Empirical Mode Decomposition (EMD) method is applied to decompose the signal into its constituent parts, and damage detection relies on the Intrinsic Mode Functions (IMFs) correspond-

ing to the vehicle speed component. This technique effectively identifies various damage scenarios considered in the study.

## Keywords

Structural Health Monitoring, Vibration-Based Damage Identification, Vehicle-Bridge Interaction, Finite Element Model, Empirical Mode Decomposition

---

## 1. Introduction

Damage refers to any alteration in the structure that negatively affects its performance or safety, such as material deterioration or boundary condition degradation. Civil structures like bridges are susceptible to natural and human-induced damage over time. Older structures are at risk of natural failure due to structural aging. Overloading on bridges and environmental effects can also lead to potential failures of bridge and structural components.

Various scholars including Maeck (2003), Yang *et al.* (2004, 2014), Hou *et al.* (2014), Amezcua-Sanchez and Adeli (2016), O'Brien *et al.* (2016), and Sun *et al.* (2016) have proposed diverse analysis methods for damage identification in bridge structures [1]-[7]. Structural Health Monitoring (SHM) techniques have emerged as an appealing alternative to traditional damage detection methods, given their potential for enhancing the safety, serviceability, and cost-efficiency of crucial infrastructure throughout its lifecycle. The implementation of Structural Health Monitoring (SHM) might be likened to the practice of monitoring the quality of drinking water to increase safety and mitigate potential threats to the community [8] [9] [10].

The growing recognition of the importance of dependable structural damage detection systems highlights the critical requirement for integrated approaches that encompass multiple aspects of infrastructure development, in line with the overarching principles of infrastructure resilience and sustainability. Waste management is of paramount importance when it comes to bolstering the resilience of infrastructure [11] [12] [13] specifically by facilitating the recycling of organic waste for the generation of biogas [14] [15]. By adopting this environmentally sustainable method, the ecological consequences of waste are mitigated, and a valuable energy source is generated. Concurrently, the implementation of waste byproduct utilization, such as cotton dust, bolsters the circular economy and contributes to the sustainability of infrastructure [16]. Moreover, it is critical to guarantee access to clean water, as this facilitates efficient waste management and enhances hygiene [17]. This is consistent with our comprehensive strategy for bolstering infrastructure resilience. Furthermore, the incorporation of machine learning into green manufacturing processes improves both efficiency and environmental friendliness, which is in perfect harmony with our overarching

objectives of sustainable infrastructure and environmental accountability [18] [19].

Having accurate information about bridge health conditions and identifying potential bridge damage is crucial. To analyze the behavior several numerical approaches are used [20] [21] [22] [23] [24]. Rigorous site investigations and laboratory testing are conducted to investigate the prevailing soil condition [25] [26] [27]. Also, the seismic performances are analyzed using available site response analysis data [28] [29]. This allows for better planning for bridge maintenance, minimizing traffic disruption, and preventing early repairs. Early detection of damage induced by vehicle vibrations provides an opportunity to implement countermeasures, including the use of stock-bridge dampers or the integration of smart materials with high damping capacity, such as shape memory alloys [30] [31]. Typically, bridges have been monitored for damage using periodic visual inspections. These methods are also utilized in the field of environmental engineering, specifically for the purpose of detecting and controlling nitrogen levels in landfill leachate to mitigate the growth of algae [32] [33]. The objective is to achieve early detection and prevention measures that guarantee long-term safety and maintain ecological equilibrium. While these methods are generally effective, they have significant drawbacks. For example, there can be variability in judgment between different bridge inspectors, making damage quantification difficult. Also, inspections require an inspector to physically be at the bridge site. Failures could occur between inspections, and initial damage might go unnoticed. Due to inconsistent bridge maintenance and challenges in inspections, numerous bridge collapses have occurred globally. Also, in some cases due to natural calamities [34] [35] [36] [37]. The Genoa bridge collapse, which resulted in forty-three fatalities in August 2018, is a recent example. This highlights the urgent need for reliable structural damage detection systems.

The damage detection method proposed in this paper employs the dynamic characteristics of structures. Various studies focused on service life [38], structural ability [39] [40] as well as clay sand [41] [42] [43] [44] [45] for the construction of buildings. However, the increase in the weight and speed of vehicles in recent years has escalated the dynamic influence on bridges. The dynamic responses generated by vehicles crossing bridges and viaducts can serve as a valuable resource for monitoring the structural health of such structures. To quantify the dynamic properties of vehicles, previous studies has utilized an Arduino microcontroller-based machine that measures vehicle speed and jerking while being attached to operating vehicles [46] [47] [48]. Dynamic models are employed to assess various aspects, such as the fatigue life of different structural parts, environmental vibration issues, and the safety and comfort of traffic on bridges [49] [50]. Vehicle-bridge interaction (VBI) is utilized to determine the vehicle-induced dynamic responses of bridges. The VBI dynamic model depends on numerous factors like the dynamic properties of bridges, vehicle speed, the dynamic properties of the vehicle, and road pavement conditions. The main

purpose of this paper is to identify damaged locations by analyzing the response of vehicles on the bridge.

## 2. Methodology

This section discusses the modelling and the damage detection method adopted in this study.

### 2.1. Vehicle Modeling

In this study, a Half car model has been taken as the design vehicle as in **Figure 1**. The vehicle model consists of a total of four degrees of freedom (DOF). Among them, the body of the vehicle has two DOFs, vertical vehicle body displacement,  $y_s$  and pitching rotation  $\theta_s$ . This rotation data can be measured by the sensor installed in the vehicle. The front and rear wheel also have a set of DOFs for vertical displacement,  $y_{r1}$  and  $y_{r2}$  respectively. Then, following D'Alembert's principle, a set of kinetic equilibrium functions are formulated for each DOF.


$$[M_v]\{\ddot{y}_v(t)\} + [C_v]\{\dot{y}_v(t)\} + [K_v]\{y_v(t)\} = \{F_v\} \quad (1)$$

### 2.2. Bridge Modeling


The bridge is modeled according to the Finite Element Method (FEM) as shown in **Figure 2**. The bridge is a simply supported bridge and it has a constant flexural rigidity,  $EI$  along the span, where,  $E$  and  $I$  refer to Young's modulus and the moment of inertia of the bridge cross section respectively. The mass per unit length of span is defined by  $m$ . The EOM for the bridge is formulated as

$$\ddot{\eta}_n(t) + 2\zeta_n\omega_n\dot{\eta}_n(t) + \omega_n^2\eta_n(t) = -\frac{1}{M_n}\{\varphi_n\}^T\{F_b(x,t)\}\delta(x-vt) \quad (2)$$

where,  $n = 1, 2, 3, \dots, N$ .

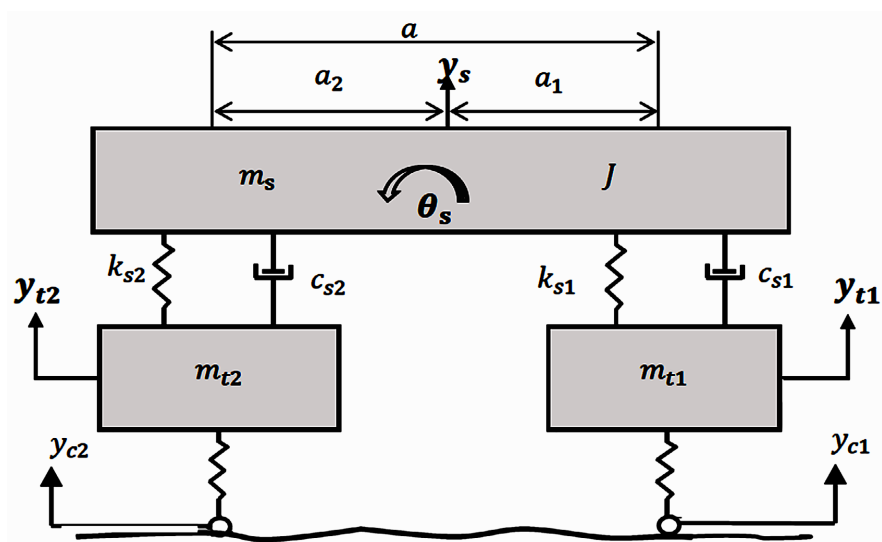

**Figure 1.** Half car vehicle model.

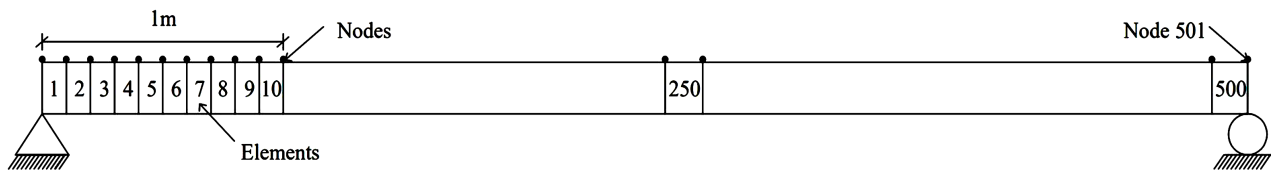

**Figure 2.** Bridge model.

### 2.3. Vehicle-Bridge Interaction

Two distinct sets of differential equations have been developed for the vehicle and the bridge, respectively. These equations are coupled to establish an interaction between the vehicular and bridge systems. To foster this interaction, compatibility conditions are applied at contact points, and coupled equations of motion are formulated. Here, **Figure 3** depicts the model of coupled vehicle-bridge vibration.

$$[M(t)]\{\ddot{Y}\} + [C(t)]\{\dot{Y}\} + [K(t)]\{Y\} = \{Q(t)\} \quad (3)$$


### 2.4. Damage Identification Method

#### 2.4.1. Empirical Mode Decomposition (EMD)

The EMD technique is an innovative tool for processing signals that can break down any type of signal, even non-stationary or nonlinear ones, into multiple Intrinsic Mode Functions (IMFs). This method has been employed in the past for identifying structural damage and monitoring structural health. To extract an IMF, a process called “sifting” is performed. This involves:

- 1) Identifying all local maxima and minima in the original time signal.
- 2) Connecting all the local maxima and minima with cubic splines to form the upper and lower envelopes.
- 3) Calculating the mean value of the two envelopes and subtracting this from the original signal.

The resultant difference between the original time history and the mean value is considered to be the IMF, assuming it meets certain conditions: the number of extrema and zero crossings must be either equal or differ by at most one, and the mean value of both the envelopes defined by the local maxima and minima should be zero at every point. The sifting continues until the residue becomes insignificantly small or it turns into a monotonic function. The original time signal can then be represented as the sum of the IMFs and the final residue. The first IMF encapsulates the highest frequency content of the original signal, while the final residue contains the lowest frequency. The method of EMD is used in this section to decompose the theoretical responses derived from the quarter car model’s VBI. The IMFs and their Fast Fourier Transform (FFT) spectra for displacement are also extracted. It is clear from the FFT spectrum of the first IMF that it relates to the bridge’s first natural frequency being affected by the vehicle speed, while the other IMFs are related to the speed pseudo-frequency part of the signal. Hence, by eliminating the first IMF from the original signal, the speed pseudo-frequency part that is sensitive to damage can be extracted.

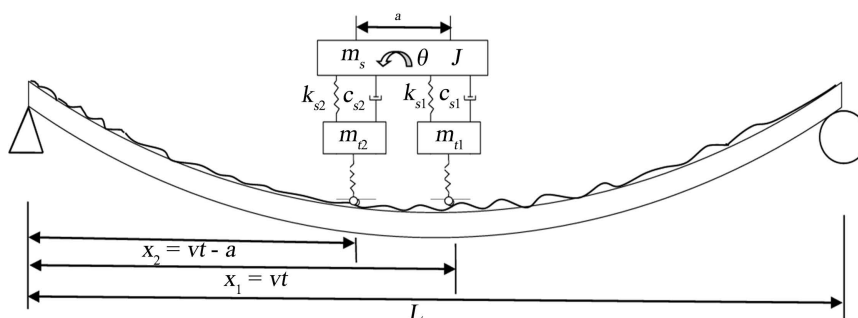

**Figure 3.** The model of coupled vehicle-bridge vibration.

### 2.4.2. IMF-Based Damage Indicator


The difference between the speed pseudo-frequency components of the acceleration signals for healthy and damaged structures is damage-sensitive. An IMF-based damage indicator, a parameter sensitive to damage, is introduced in this section to deal with the interference caused by the road surface profile. The EMD is applied to the difference between the acceleration signals for the healthy and damaged structures. The first IMF corresponds to the bridge's natural frequency from the frequency content of the IMFs. Therefore, the other IMFs correspond to the speed pseudo-frequency part of the signal. The damage indicator is obtained by summing all IMFs except the first one. The results for both damage scenarios are displayed using displacement responses. Three different crack sizes are considered for both damage scenarios, and a clear peak near the damage location can be seen when the displacement signal is used in all cases.

## 3. Damage Identification


The differential equations representing the VBI system have time-varying coefficients. The Newmark's  $\beta$  method is used to solve the coupled formulation resulting from these differential equations of bridge and vehicle subsystems. This numerical method segments time into various steps with an increment of  $\Delta t$ . Subsequently, for all damage scenarios discussed above, the time history responses of bridge displacement at different sensor locations are determined. The roughness of the Class A-B deck surface is taken into account. As per **Figure 4**, the response considered here is the rotational displacement of the vehicle body. Damage in the bridge is introduced via a reduction in stiffness.

### 3.1. Damage Identification for Scenario D1


The rotational displacement response of the vehicle body is taken for both healthy and damaged conditions to apply the EMD. From **Figure 5** and **Figure 6**, The IMFs obtained from the EMD and their FFT spectra are shown in Figures for rotational displacement. As per **Figure 7**, it can be seen from the FFT spectrum of the first IMF that it is associated with the bridge's first natural frequency (**Table 1**). The remaining IMFs are related to the speed pseudo-frequency part of the signal.

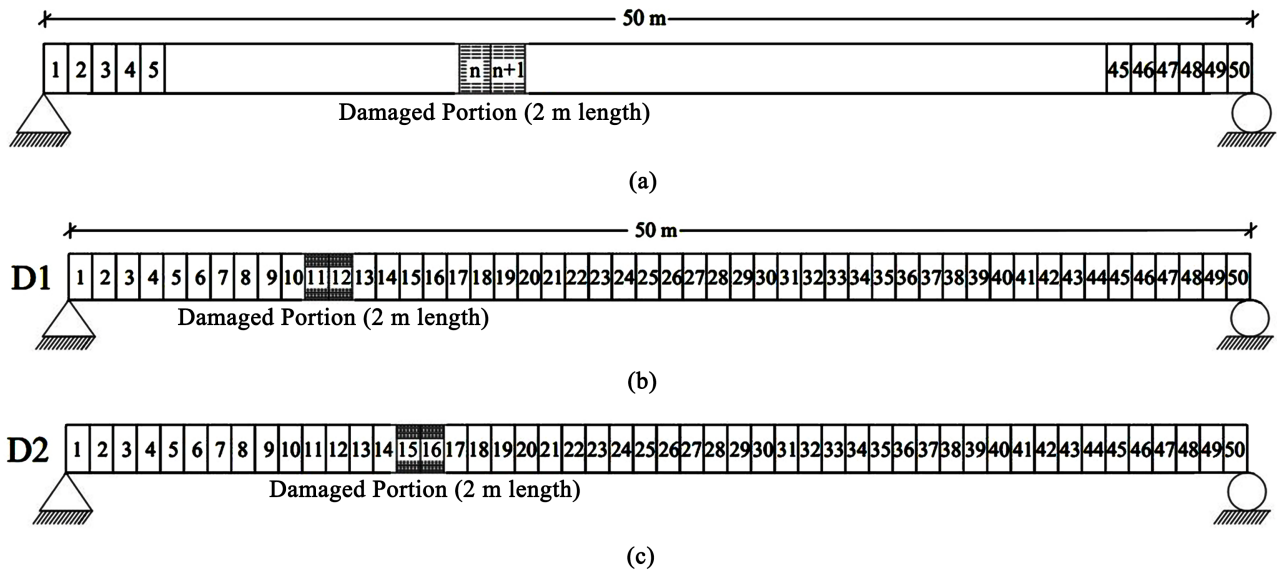

**Figure 4.** Introducing damage on the bridge at (a) two arbitrary elements, (b) element number 11 and 12, (c) element number 15 and 16.

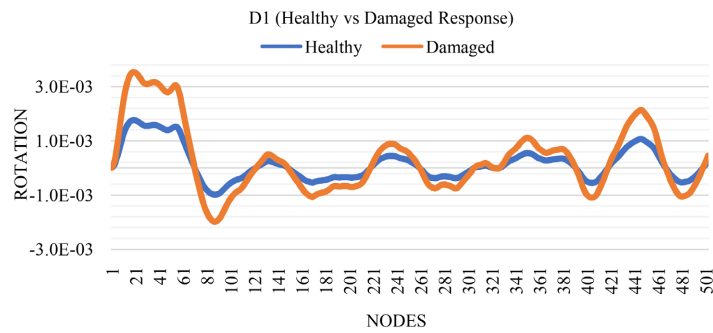



**Figure 5.** Responses and IMFs of rotational displacement (Healthy vs Damaged).

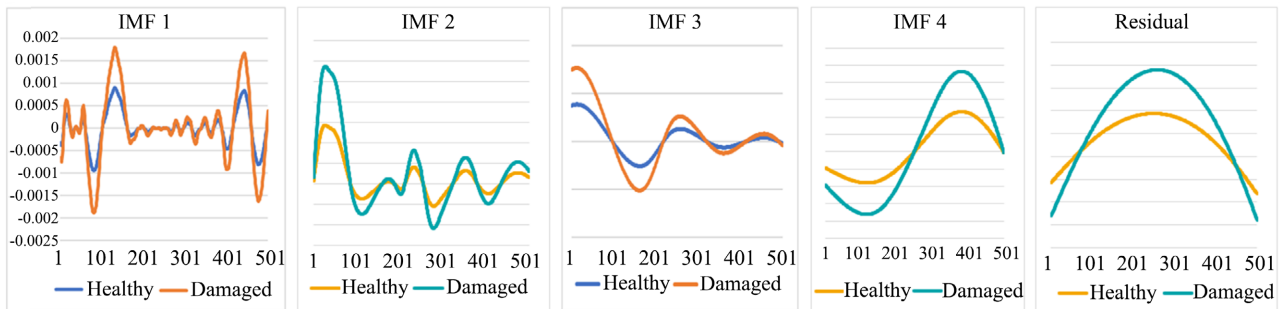

**Figure 6.** FFT of the rotational displacement.

**Table 1.** Frequencies of bridge and vehicle.

Bridge Freq.	Vehicle Freq.	Speed Pseudo Freq.
2.008	1.05388	1.396
8.03	1.13376	
18.07	8.73176	

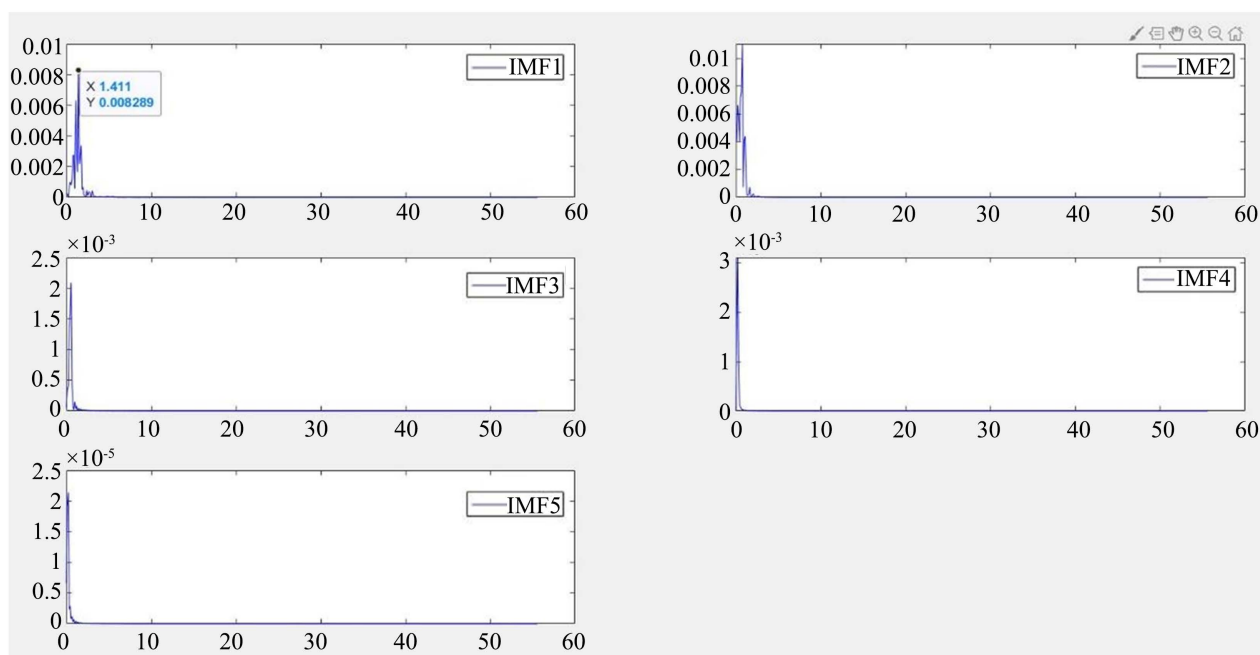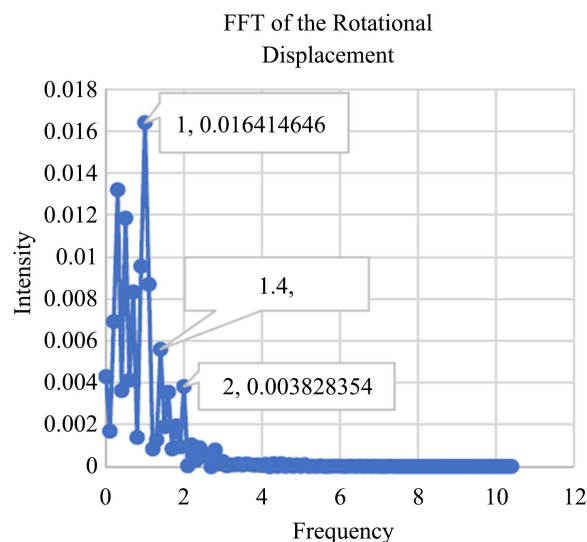

**Figure 7.** FFT spectrum of the different IMF.

Also, from **Figure 8**, the first damage on the bridge was introduced by reduction of stiffness at a distance of 11 m to 12 m from the left support. Now difference between the added IMFs except 1st gives the damaged location by removing the first IMF from the original signal, the speed pseudo-frequency part will remain which is to be sensitive to damage and can be extracted from the signal.

Now, the following **Figure 9** will show the damage case (D1) where the prominent peak distinguishes the damage position for damage severity cases of 25%, 40% and 50%. After analysis of the graphs, it can be concluded that the proposed damage identification method works very well for damage identification purposes.



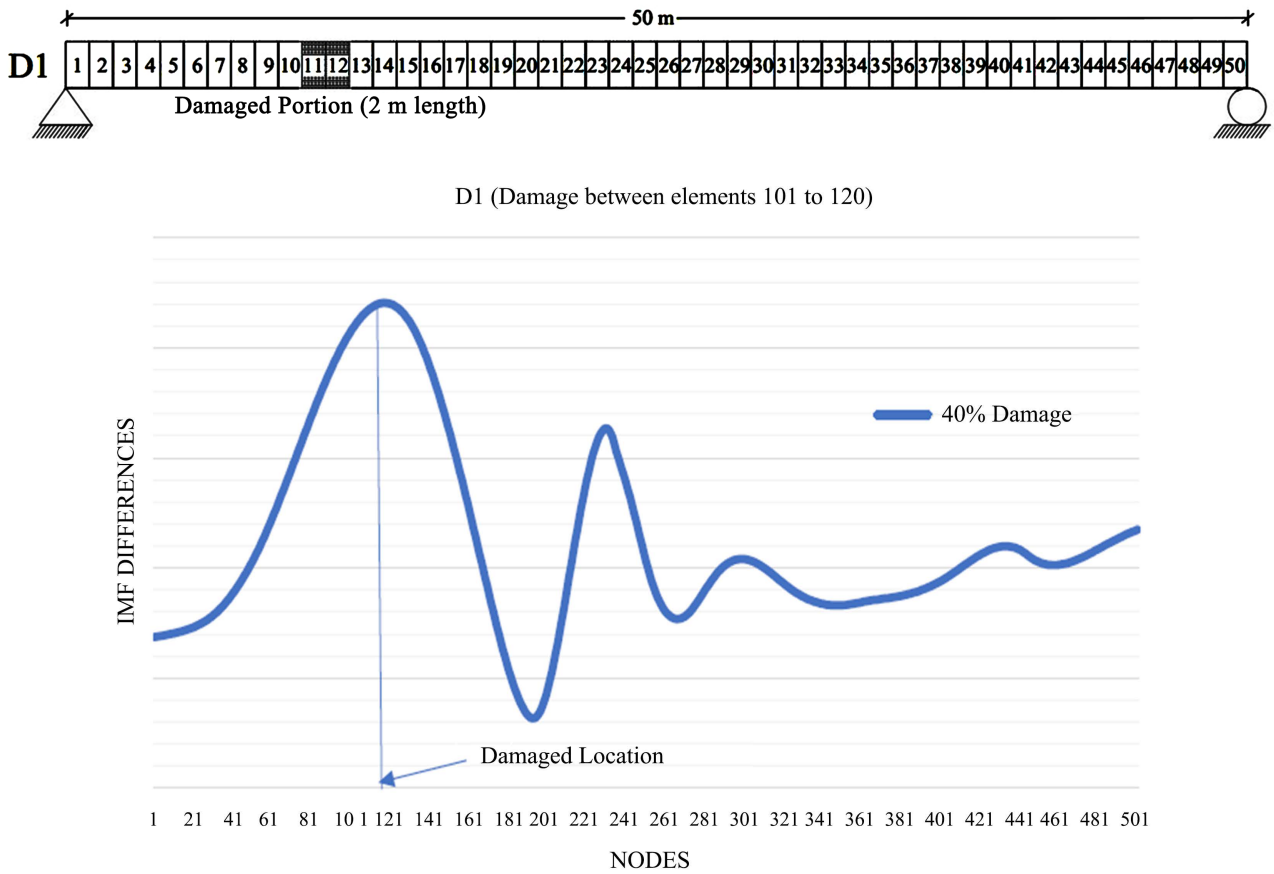


Figure 8. Damage identification for (D1).


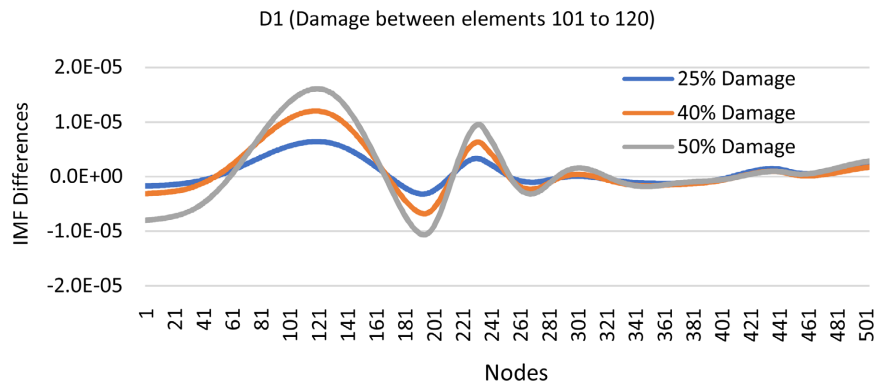


Figure 9. Damage identification for different severity cases (D1).

### 3.2. Damage Identification for Scenario D2

Scenario of the single-damage case, D2, will be shown in **Figure 10** below and corresponding peak differentiate between the damage positions for damage severity cases of 25%, 40% and 50%. The peaks referring to IMF differences increase due to change in the damage severity. The difference between the speed pseudo-frequency parts of the acceleration signals for the healthy and damaged structures is sensitive to damage.

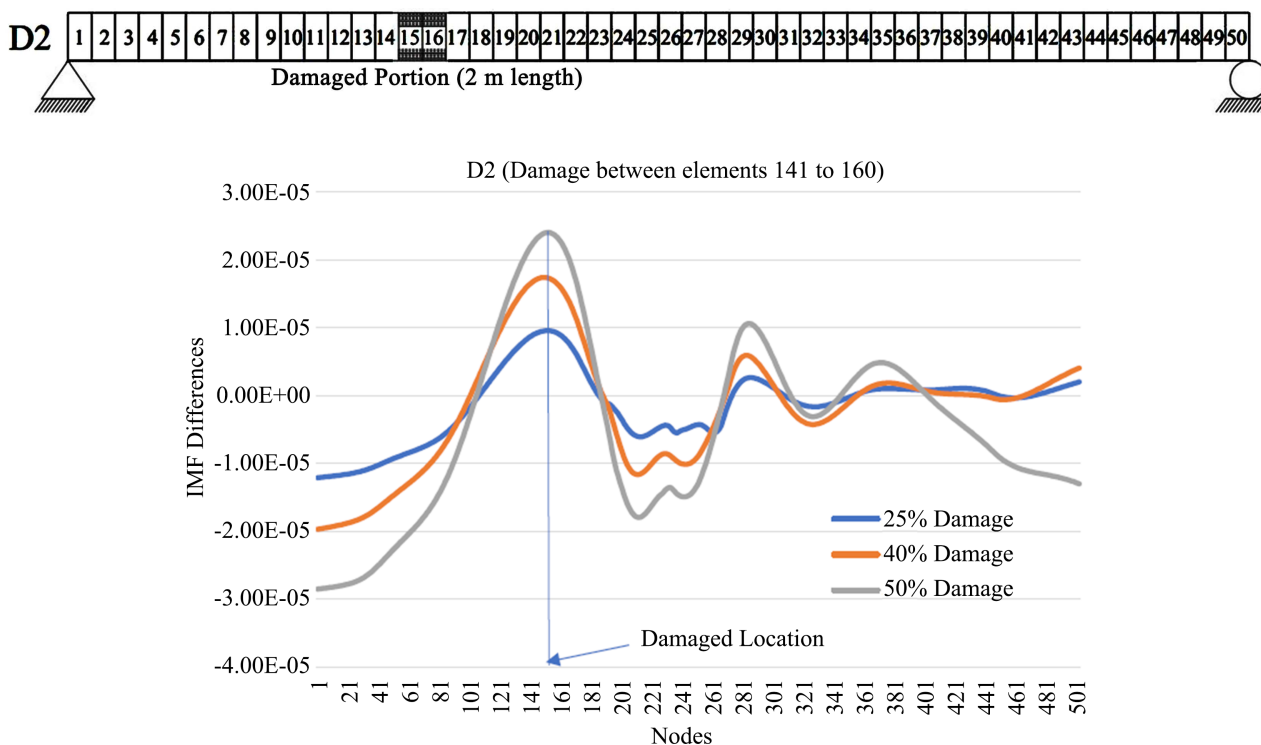

**Figure 10.** Damage identification for different severity cases (D2).

#### 4. Conclusion

In this study, we have developed a novel method for indirect damage detection based on the rotational displacement response of a vehicle. We applied a computational model to a real-world structure, the Teesta Bridge, and tested the efficacy of the method by examining four diverse damage scenarios, each located at a different point on the bridge and with varying levels of severity. We created a two-dimensional finite element (FE) model of the bridge for the purpose of modeling the interaction between the vehicle and the bridge. Numerical investigations verified that, given appropriate vehicle parameters, the vibration response of the vehicle is effective not only in detecting changes in the bridge due to damage but also in pinpointing the location of the damage and assessing its severity. This study led us to several key findings:

- 1) The interaction between the vehicle and bridge significantly influences the dynamic response, a topic explored in this paper.
- 2) The dynamic behavior of a vehicle traversing a bridge can be harnessed to determine the pitching rotation, which in turn can be used to identify bridge damage.
- 3) The Intrinsic Mode Function (IMF) differences for damage levels of 25%, 40%, and 50% were calculated and graphed alongside the non-damaged IMF. The results showed a clear distinction between damaged and undamaged states.
- 4) This method was successful in determining the location of the damage on the bridge and in comparing the severity of different instances of damage.

## Conflicts of Interest

The authors declare no conflicts of interest regarding the publication of this paper.

## References

- [1] Maeck, J. (2003) Damage Assessment of Civil Engineering Structures by Vibration Monitoring.
- [2] Yang, Y.B., Lin, C.W. and Yau, J.D. (2004) Extracting Bridge Frequencies from the Dynamic Response of a Passing Vehicle. *Journal of Sound and Vibration*, **272**, 471-493. [https://doi.org/10.1016/S0022-460X\(03\)00378-X](https://doi.org/10.1016/S0022-460X(03)00378-X)
- [3] Yang, Y.B., Li, Y.C. and Chang, K.C. (2014) Constructing the Mode Shapes of a Bridge from a Passing Vehicle: A Theoretical Study. *Smart Structures and Systems*, **13**, 797-819. <https://doi.org/10.12989/sss.2014.13.5.797>
- [4] Hou, L.Q., Zhao, X.F., Ou, J.P. and Liu, C.C. (2014) A Review of Nondeterministic Methods for Structural Damage Diagnosis. *Journal of Vibration and Shock*, **33**, 50-58.
- [5] Amezcua-Sanchez, J.P. and Adeli, H. (2016) Signal Processing Techniques for Vibration-Based Health Monitoring of Smart Structures. *Archives of Computational Methods in Engineering*, **23**, 1-15. <https://doi.org/10.1007/s11831-014-9135-7>
- [6] Obrien, E., Malecjafarian, A. and Gonzalez, A. (2016) Application of Empirical Mode Decomposition to Drive-by Bridge Damage Detection. *European Journal of Mechanics*, **17**, 256-263.
- [7] Sun, Z., Nagayama, T., Su, D. and Fujino, Y. (2016) A Damage Detection Algorithm Utilizing Dynamic Displacement of Bridge under Moving Vehicle. *Shock and Vibration*, **2016**, Article ID: 845456. <https://doi.org/10.1155/2016/8454567>
- [8] Chowdhury, O., Rashid, R. and Karim, M.R. (2019) E. Coli Removal Efficiency and Physical-Chemical Parameter Analysis of Mineral Pot Filters in Bangladesh. *2nd International Conference on Water and Environmental Engineering (ICWEE2019)*, Dhaka, 19-22 January 2019, 1-8.
- [9] Karim, M.R., Khan, M.A.I., Chowdhury, O.S. and Niloy, R.R. (2018) Assessment of Various Methods to Remove Pathogen from Raw Water to Meet Who Standard for Domestic Consumption. *7th Brunei International Conference on Engineering and Technology 2018 (BICET 2018)*, Bandar Seri Begawan, 12-14 November 2018, 1-4. <https://doi.org/10.1049/cp.2018.1508>
- [10] Niloy, M.R.R. and Chowdhury, O.S. (2017) Effectiveness of Household Water Treatment Technologies Based on WHO Guidelines. Master's Thesis, Islamic University of Technology (IUT), Gazipur.
- [11] Ahmed, M.A., Hossain, M. and Islam, M. (2017) Prediction of Solid Waste Generation Rate and Determination of Future Waste Characteristics at South-Western Region of Bangladesh Using Artificial Neural Network. *Waste Safe 2017*, Khulna, 25-27 February 2017, 134-143.
- [12] Ahmed, M.A. and Moniruzzaman, S.M. (2018) A Study on Plastic Waste Recycling Process in Khulna City. *4th International Conference on Civil Engineering for Sustainable Development (ICCESD 2018)*, Khulna, 9-10 February 2018. [https://iccesd.com/proc\\_2018/Papers/r\\_p4227.pdf](https://iccesd.com/proc_2018/Papers/r_p4227.pdf)
- [13] Ahmed, M.A. and Chakrabarti, S.D. (2018) Scenario of Existing Solid Waste Management Practices and Integrated Solid Waste Management Model for Developing

- Country with Reference to Jhenaidah Municipality, Bangladesh. *4th International Conference on Civil Engineering for Sustainable Development (ICCESD 2018)*, Khulna, 9-10 February 2018. [https://iccesd.com/proc\\_2018/Papers/r\\_p4230.pdf](https://iccesd.com/proc_2018/Papers/r_p4230.pdf)
- [14] Roy, P., Ahmed, M.A. and Shah, M.H. (2021) Biogas Generation from Kitchen and Vegetable Waste in Replacement of Traditional Method and Its Future Forecasting by Using ARIMA Model. *Waste Disposal & Sustainable Energy*, **3**, 165-175. <https://doi.org/10.1007/s42768-021-00070-3>
- [15] Ahmed, M.A., Roy, P., Bari, A. and Azad, M. (2019) Conversion of Cow Dung to Biogas as Renewable Energy through Mesophilic Anaerobic Digestion by Using Silica Gel as Catalyst. *5th International Conference on Mechanical Engineering and Renewable Energy (ICMERE-2019)*, Chittagong, 11-13 December 2019, 163-167.
- [16] Ahmed, M.A., Roy, P., Shah, M.H., Argha, D.P., Datta, D. and Riyad, R.H. (2021) Recycling of Cotton Dust for Organic Farming Is a Pivotal Replacement of Chemical Fertilizers by Composting and Its Quality Analysis. *Environmental Research and Technology*, **4**, 108-116. <https://doi.org/10.35208/ert.815322>
- [17] Roy, P., Ahmed, M.A. and Kumer, A. (2019) An Overview of Hygiene Practices and Health Risks Related to Street Foods and Drinking Water from Roadside Restaurants of Khulna City of Bangladesh. *Eurasian Journal of Environmental Research*, **3**, 47-55. <https://dergipark.org.tr/en/pub/ejere/issue/49620/590483>
- [18] Argha, D.B.P. and Ahmed, M.A. (2023) Design of Photovoltaic System for Green Manufacturing by using Statistical Design of Experiments. <https://doi.org/10.20944/preprints202310.1913.v2>
- [19] Argha, D.B.P. and Ahmed, M.A. (2023) A Machine Learning Approach to Understand the Impact of Temperature and Rainfall Change on Concrete Pavement Performance Based on Ltp Data. <https://doi.org/10.20944/preprints202310.2057.v1>
- [20] Zaman, M.W., Mita, K.S., Al Azad, A., Hossain, R. and Ul, M. (2019) A Numerical Study on Slope Stability Analysis by Finite Element Method Using Fentij-2D Application. *International Conference on Disaster Risk Management (ICDRM 2019)*, Dhaka, 12-14 January 2019, 168-174.
- [21] Bayomy, F., Muftah, A., Kassem, E., Tousef, F. and Alkuime, H. (2018) Calibration of the AASHTOWare Pavement ME Design Performance Models for Flexible Pavements in Idaho (No. FHWA-ID-18-235). Transportation Department, Idaho.
- [22] Arafat, M., Nafis, S.R., Sadeghvaziri, E. and Tousif, F. (2020) A Data-Driven Approach to Calibrate Microsimulation Models Based on the Degree of Saturation at Signalized Intersections. *Transportation Research Interdisciplinary Perspectives*, **8**, Article ID: 100231. <https://doi.org/10.1016/j.trip.2020.100231>
- [23] Pham, T., Zaman, M.W. and Vu, T. (2022) Modeling Triaxial Testing with Flexible Membrane to Investigate Effects of Particle Size on Strength and Strain Properties of Cohesionless Soil. *Transportation Infrastructure Geotechnolgy*, **9**, 417-441. <https://doi.org/10.1007/s40515-021-00167-6>
- [24] Zaman, M.W. (2020) A Study on the Triaxial Shear Behavior of Geosynthetic Reinforced Soil by Discrete Element Method. Master's Thesis, The University of Texas Rio Grande Valley, Edinburg.
- [25] Zaman, M.W., Hossain, M.R. and Shahin, H.M. (2017) Correlation Studies between Consolidation Prop. & Some Index Prop. for Dhaka-Chi. Highway Soil. *Proceedings of the First International Conference on Engineering Research and Practice*, 4-5 February 2017, Dhaka, 4-5.
- [26] Zaman, M.W., Hossain, M.R., Shahin, H. and Alam, A.A. (2016) A Study on Corre-

- lation between Consolidation Properties of Soil with Liquid Limit, *in situ* Water Content, Void Ratio and Plasticity Index. *The 3rd International Conference on Geotechnics for Sustainable Infrastructure Development*, Hanoi, 24-25 November 2016, 899-902.
- [27] Hasnat, A., Ahmed, S.T., Mustafa, T., Chowdhury, M.S. and Prince, S.M. (2020) Improvement of Bearing Capacity of Clay Soil Using Fly Ash. *AIUB Journal of Science and Engineering (AJSE)*, **19**, 55-62. <https://doi.org/10.53799/ajse.v19i2.85>
- [28] Shahin, H.M., Kabir, M.U. and Islam, S. (2023) Seismic Hazard Analysis at Site Specific Condition: Case Study in Araihaazar, Bangladesh. *IUT Journal of Engineering and Technology*, **15**, 8-20.
- [29] Shahin, H.M., Kabir, M.U. and Islam, S. (2023) Comprehensive Study on CPT-Based Liquefaction Vulnerability Assessment: The Case Study of Araihaazar, Bangladesh Monitoring. *2nd International Conference on Advances in Civil Infrastructure and Construction Materials*, Dhaka, 26-28 July 2023, 119-128.
- [30] Rahman, M.S., Hasnat, A., Ahmed, S.T. and Hasan, M.R. (2020) Floor Vibration Control by Stock-Bridge Damper Induced by Walking Excitation and Earthquake. *International Conference on Earth & Environmental Sciences and Technology (ICEEST)*, Bangladesh, 25-30 January 2020.
- [31] Hasnat, A., Ahmed, S.T. and Ahmed, H. (2020) A Review of Utilizing Shape Memory Alloy in Structural Safety. *AIUB Journal of Science and Engineering (AJSE)*, **19**, 116-125. <https://doi.org/10.53799/ajse.v19i3.111>
- [32] Ahmed, M.A. and Redowan, M. (2023) Fate and Transport of the Biologically Treated Landfill Leachate Induced Dissolved Organic Nitrogen (DON). *AEESP Research and Education Conference*, Boston, 20-23 June 2023. <https://par.nsf.gov/biblio/10431230-fate-transport-biologically-treated-landfill-leachate-induced-dissolved-organic-nitrogen-don>
- [33] Rashid, M.R. and Ashik, M. (2023) Evaluation of Physicochemical Treatment Technologies for Landfill Leachate Induced Dissolved Organic Nitrogen (DON). *AEESP Research and Education Conference*, Boston, 20-23 June 2023. <https://par.nsf.gov/biblio/10431232-evaluation-physicochemical-treatment-technologies-landfill-leachate-induced-dissolved-organic-nitrogen-don>
- [34] Mita, K.S., Azad, A.A., Zaman, M.W., Sakib, M., Amin, G.M.R., Asik, T.Z., Rahman, M.M., et al. (2018) Effectiveness of Adaptive Measures against Storm Surge Hazard Based on Field Experience from a Real Time Cyclone in Bangladesh Coast. *Proceedings of 2nd International Conference on Sustainable (ICS)*, Dhaka, February 2018.
- [35] Al Azad, A.A., Mita, K.S., Zaman, M.W., Akter, M., Asik, T.Z., Haque, A., Rahman, M.M., et al. (2018) Impact of Tidal Phase on Inundation and Thrust Force Due to Storm Surge. *Journal of Marine Science and Engineering*, **6**, Article 110. <https://doi.org/10.3390/jmse6040110>
- [36] Zaman, M.W., Asik, T.Z., Rumi, M.Y. and Shahin, H.M. (2016) Geotechnical Hazard Analysis of River Embankment of Bangladesh and Its Protectability. *GEOMATE Journal*, **10**, 2050-2057. <https://doi.org/10.21660/2016.22.5329>
- [37] Rahman, M.R., Tareque, T. and Mirmotalebi, S. (2023) Evaluating the Influence of Sea Level Rise on Beel Kapalia's Livelihood and Local Adaptation Strategies: Perspectives from the Local Community. *Open Journal of Civil Engineering*, **13**, 617-636. <https://doi.org/10.4236/ojce.2023.134042>
- [38] Zahid, C.Z.B., Rezwan, M.M. and Mohammed, T.U. (2023) Service Life Optimization and Life Cycle Assessment of Concrete Using SCMs as Partial Replacement of

- Cement. *Journal of Physics: Conference Series*, **2521**, Article ID: 012008.  
<https://doi.org/10.1088/1742-6596/2521/1/012008>
- [39] Zahid, C.Z.B., Alam, S., Fahik, A., Khan, M.I. and Mohammed, T.U. (2023) Different Orientations of Shear Wall in a Reinforced Concrete Structure to Control Drift and Deflection. *Journal of Physics: Conference Series*, **2521**, Article ID: 012006.  
<https://doi.org/10.1088/1742-6596/2521/1/012006>
- [40] Islam, S., Shahin, H.M., Kabir, M.U. and Islam, M. (2023) Provision of Building Codes in the Context of Seismic Site Characterization and Liquefaction Susceptibility Assessment. *GEOMATE Journal*, **25**, 50-58.  
<https://doi.org/10.21660/2023.108.3795>
- [41] Kabir, M.U., Islam, M.S., Nazrul, F.B. and Shahin, H.M. (2023) Comparative Stability and Behaviour Assessment of a Hill Slope on Clayey Sand Hill Tracts. *International Journal of Engineering Trends and Technology*, **71**, 11-24.  
<https://doi.org/10.14445/22315381/IJETT-V71I1P202>
- [42] Kabir, M.U., Sakib, S.S., Rahman, I. and Shahin, H.M. (2019) Performance of ANN Model in Predicting the Bearing Capacity of Shallow Foundations. In: Sundaram, R., Shahu, J. and Havanagi, V., Eds., *Geotechnics for Transportation Infrastructure*, Springer, Singapore, 695-703. [https://doi.org/10.1007/978-981-13-6713-7\\_55](https://doi.org/10.1007/978-981-13-6713-7_55)
- [43] Hoque, M.J., Bayezid, M., Sharan, A.R., Kabir, M.U. and Tareque, T. (2023) Prediction of Strength Properties of Soft Soil Considering Simple Soil Parameters. *Open Journal of Civil Engineering*, **13**, 479-496. <https://doi.org/10.4236/ojce.2023.133035>
- [44] Kabir, M.U., Hossain, S.A., Alam, M.D. and Azim, M.D. (2017) Numerical Analyses of the Karnaphuli River Tunnel. Master's Thesis, Islamic University of Technology (IUT), Gazipur.
- [45] Islam, M.M., Zahid, C.Z.B., Umama, M.A., Tareque, T. and Mirmotalebi, S. (2023) Influence of Salt-Lime Stabilization on Soil Strength for Construction on Soft Clay. *Open Journal of Civil Engineering*, **13**, 528-539.  
<https://doi.org/10.4236/ojce.2023.133038>
- [46] Rashid, M., Ahmed, S.T. and Kalam, N.B. (2017) Evaluating Comfort for Public Buses in Dhaka City. Master's Thesis, Islamic University of Technology (IUT), Gazipur.
- [47] Rashid, M.M., Ahmed, S.T., Kalam, N.B., Anik, M.A.H. and Hossain, M. (2018) Evaluation of Public Bus Comfort in Dhaka City. *Proceedings of the 4th International Conference on Advances in Civil Engineering*, CUET, Chittagong, 19-21 December 2018, 19-21.
- [48] Anik, M.A.H., Hossain, M., Raihan, M.A., Ahmed, S.T. and Rashid, M. (2020) Assessing Public Bus Comfort Perception of Bus Passengers in Dhaka, Bangladesh. *99th Annual Meeting of Transportation Research Board*, Washington DC, 12-16 January 2020, 44.
- [49] Alkuime, H., Tousif, F., Kassem, E. and Bayomy, F.M. (2020) Review and Evaluation of Intermediate Temperature Monotonic Cracking Performance Assessment Testing Standards and Indicators for Asphalt Mixes. *Construction and Building Materials*, **263**, Article ID: 120121.  
<https://doi.org/10.1016/j.conbuildmat.2020.120121>
- [50] Sayem, A.S.M., Tousif, F. and Hasnat, A. (2014) A Study to Assess the Suitability of Using Polypropylene in Concrete as a Partial Replacement of Coarse Aggregate. Master's Thesis, Islamic University of Technology (IUT), Gazipur.