

Reflection of Plane Waves from a Free Surface of an Initially Stressed Transversely Isotropic Dissipative Medium

Baljeet Singh¹, Jyoti Arora²

¹Department of Mathematics, Post Graduate Government College, Chandigarh, India

²B.S.A.I.T.M, Alampur, Faridabad, India

E-mail: bsinghgc11@gmail.com

Received June 23, 2011; revised July 15, 2011; accepted July 23, 2011

Abstract

The governing equations of a transversely isotropic dissipative medium are solved analytically to obtain the speeds of plane waves. The appropriate solutions satisfy the required boundary conditions at the stress-free surface to obtain the expressions of the reflection coefficients of reflected quasi-P (qP) and quasi-SV (qSV) waves in closed form for the incidence of qP and qSV waves. A particular model is chosen for numerical computation of these reflection coefficients for a certain range of the angle of incidence. The numerical values of these reflection coefficients are shown graphically against the angle of incidence for different values of initial stress parameter. The impact of initial stress parameter on the reflection coefficients is observed significantly.

Keywords: Transversely Isotropic, Dissipative Medium, Initial Stress, Plane Waves, Reflection, Reflection Coefficients

1. Introduction

We can not know the Earth completely by assuming mere an elastic body. If we consider various additional parameters, e.g. porosity, initial stress, viscosity, dissipation, temperature, voids, diffusion, etc., then we can understand better the interior of the Earth. Initial stresses in a medium are caused by various reasons such as creep, gravity, external forces, difference in temperatures, etc. The reflection of plane waves at free surface, interface and layers is important in estimating the correct arrival times of plane waves from the source. Various researchers studied the reflection and transmission problems at free surface, interfaces and in layered media [1-12]. The study of reflection of plane waves in the presence of initial stresses as well as dissipation is interesting. With the help of Biot [13] theory of incremental deformation, Selim [14] studied the reflection of plane waves at a free surface of an initially stressed dissipative medium. In the present paper, we studied the problem on reflection of plane waves at a stress-free surface of an initially stressed transversely isotropic solid half-space with dissipation. The reflection coefficients of reflected waves are com-

puted numerically to observe the effect of initial stress.

2. Formulation of the Problem and Solution

Following Biot [13], the basic dynamical equations of motion in x-z plane for an infinite, initially stressed medium, in the absence of external body forces are,

$$\begin{aligned} \frac{\partial s_{11}}{\partial x} + \frac{\partial s_{13}}{\partial z} - \rho \frac{\partial \omega}{\partial z} &= \rho \frac{\partial^2 u}{\partial t^2}, \\ \frac{\partial s_{31}}{\partial x} + \frac{\partial s_{33}}{\partial z} - \rho \frac{\partial \omega}{\partial x} &= \rho \frac{\partial^2 w}{\partial t^2}, \end{aligned} \quad (1)$$

where ρ is the density, $\omega = \frac{1}{2} \left(\frac{\partial w}{\partial x} - \frac{\partial u}{\partial z} \right)$ is rotational

component, s_{ij} ($i, j = 1, 3$) are incremental stress components, u and w are the displacement components.

Following Biot [13], the stress-strain relations are

$$\begin{aligned} s_{11} &= (C_{11} + P) \frac{\partial u}{\partial x} + (C_{13} + P) \frac{\partial w}{\partial z}, \\ s_{13} = s_{31} &= C_{44} \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), s_{33} = C_{33} \frac{\partial w}{\partial z} + C_{13} \frac{\partial u}{\partial x}, \end{aligned} \quad (2)$$

where C_{ij} are the incremental elastic coefficients.

For dissipative medium, elastic coefficients are replaced by the complex constants:

$$\begin{aligned} C_{11} &\rightarrow C_{11}^R + iC_{11}^I, C_{13} \rightarrow C_{13}^R + iC_{13}^I, \\ C_{33} &\rightarrow C_{33}^R + iC_{33}^I, C_{44} \rightarrow C_{44}^R + iC_{44}^I, \end{aligned} \quad (3)$$

where, $i = \sqrt{-1}$, $C_{11}^R, C_{11}^I, C_{13}^R, C_{13}^I, C_{33}^R, C_{33}^I, C_{44}^R, C_{44}^I$ are real. Following Fung [15], the stress and strain components in dissipative medium are,

$$s_{ij} = \bar{s}_{ij} e^{i\bar{\omega}t}, u_i = \bar{u}_i e^{i\bar{\omega}t}, \quad (4)$$

where $(i, j = 1, 3)$ and $\bar{\omega}$ being the angular frequency.

With the help of Equations (3) and (4), the Equation (2) becomes,

$$\begin{aligned} \bar{s}_{11} &= (C_{11}^R + iC_{11}^I + P) \frac{\partial u}{\partial x} + (C_{13}^R + iC_{13}^I + P) \frac{\partial w}{\partial z}, \\ \bar{s}_{31} = \bar{s}_{13} &= (C_{44}^R + iC_{44}^I) \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), \\ \bar{s}_{33} &= (C_{33}^R + iC_{33}^I) \frac{\partial w}{\partial z} + (C_{13}^R + iC_{13}^I) \frac{\partial u}{\partial x}, \end{aligned} \quad (5)$$

With the help of Equation (5), the Equation (1) becomes,

$$\begin{aligned} (C_{11}^R + P) \frac{\partial^2 \bar{u}}{\partial x^2} + (C_{13}^R + C_{44}^R + \frac{P}{2}) \frac{\partial^2 \bar{w}}{\partial x \partial z} + (C_{44}^R + \frac{P}{2}) \frac{\partial^2 \bar{u}}{\partial z^2} \\ + \rho \bar{\omega}^{-2} \bar{u} + i \left[C_{11}^I \frac{\partial^2 \bar{u}}{\partial x^2} + (C_{13}^I + C_{44}^I) \frac{\partial^2 \bar{w}}{\partial x \partial z} + C_{44}^I \frac{\partial^2 \bar{u}}{\partial z^2} \right] = 0, \end{aligned} \quad (6)$$

$$\begin{aligned} C_{33}^R \frac{\partial^2 \bar{w}}{\partial z^2} + (C_{13}^R + C_{44}^R + \frac{P}{2}) \frac{\partial^2 \bar{u}}{\partial x \partial z} \\ + (C_{44}^R - \frac{P}{2}) \frac{\partial^2 \bar{w}}{\partial x^2} + \rho \bar{\omega}^{-2} \bar{w} \\ + i \left[(C_{13}^I + C_{44}^I) \frac{\partial^2 \bar{u}}{\partial x \partial z} + C_{44}^I \frac{\partial^2 \bar{w}}{\partial x^2} + C_{33}^I \frac{\partial^2 \bar{w}}{\partial z^2} \right] = 0, \end{aligned} \quad (7)$$

The displacement vector $\mathbf{U}^{(n)} = (u^n, 0, w^n)$ is given by,

$$\mathbf{U}^{(n)} = A_n \mathbf{d}^{(n)} e^{i\omega_n t}, \quad (8)$$

where (n) assigns an arbitrary direction of propagation of waves, $\mathbf{d}^{(n)} = (d_1^n, d_3^n)$ is the unit displacement vector and $\omega_n = k_n \left[c_n t - (\mathbf{X} \cdot \Gamma^{(n)}) \right]$ is the phase factor, in which $\Gamma^{(n)} = (\Gamma_1^n, \Gamma_3^n)$ is the unit propagation vector, c_n is the velocity of propagation $\mathbf{X} = (x, z)$, and k_n is corresponding wave number, which is related to the angular frequency by $\bar{\omega} = k_n c_n$.

The displacement components u^n and w^n are written as

$$\begin{pmatrix} u^n \\ w^n \end{pmatrix} = \begin{pmatrix} A_n d_1^n \\ A_n d_3^n \end{pmatrix} e^{\left[-ik_n(x\Gamma_1^n + z\Gamma_3^n - c_n t) \right]}, \quad (9)$$

Making use of Equation (9) into the Equations (6) and (7), we obtain a system of two homogeneous equations, which as non-trivial solution if

$$(\rho c_n^2)^2 - (\rho c_n^2) \mathbf{I} + \mathbf{P}_n = 0, \quad (10)$$

where,

$$\mathbf{I} = D_1 + D_2, \mathbf{P}_n = D_1 D_3 - D_2^2,$$

$$\begin{aligned} D_1 = \left\{ (C_{11}^R + R) \Gamma_1^{(n)^2} \right\} + \left(C_{44}^R + \frac{P}{2} \right) \cdot \Gamma_3^{(n)^2} \\ + i \left[(C_{11}^I) \Gamma_1^{(n)^2} + (C_{44}^I) \cdot \Gamma_3^{(n)^2} \right], \end{aligned}$$

$$D_2 = \left[\left(C_{13}^R + C_{44}^R + \frac{P}{2} \right) \Gamma_1^n \Gamma_3^n + i (C_{13}^I + C_{44}^I) \Gamma_1^n \Gamma_3^n \right],$$

D_3

$$= \left\{ \left[\left(C_{44}^R - \frac{P}{2} \right) \Gamma_1^{n^2} + C_{33}^R \Gamma_3^{n^2} \right] + i \left[(C_{44}^I) \Gamma_1^{n^2} + C_{33}^I \Gamma_3^{(n)^2} \right] \right\},$$

$$\text{The roots } c_n^2 = \frac{\mathbf{I} + \sqrt{\mathbf{I}^2 - 4\mathbf{P}_n}}{2\rho}, c_n^2 = \frac{\mathbf{I} - \sqrt{\mathbf{I}^2 - 4\mathbf{P}_n}}{2\rho}$$

correspond to quasi-P (qP) waves and quasi-SV (qSV) waves respectively.

The above two roots give the square of velocities of propagation as well as damping. Real parts of the right hand sides correspond to phase velocities and the respective imaginary parts correspond to damping velocities of qP and qSV waves, respectively. It is observed that both c_1^2 and c_2^2 depend on initial stresses, damping and direction of propagation Γ^n . In the absence of initial stresses and damping, the above analysis corresponds to the case of transversely isotropic elastic solid.

3. Reflection of Plane Waves from Free Surface

We consider an initially stressed dissipative half-space occupying the region $z \geq 0$ (**Figure 1**). In this section, we shall derive the closed form expressions for the reflection coefficients for incident qP or qSV waves.

The displacement components of incident and reflected waves are as,

$$u(x, z, t) = \sum_{j=1}^4 A_j d_1^{(j)} e^{i\omega_j t}, w(x, z, t) = \sum_{j=1}^4 A_j d_3^{(j)} e^{i\omega_j t}, \quad (11)$$

where,

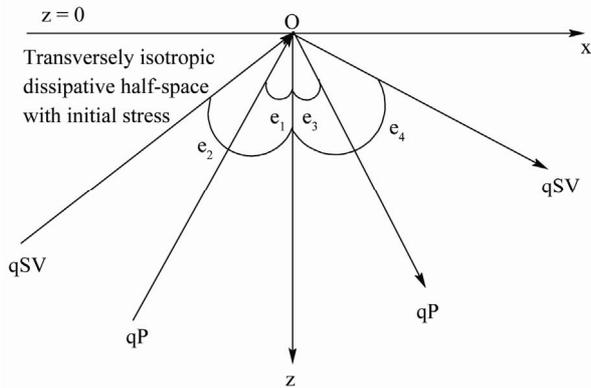


Figure 1. Geometry of the problem.

$$\begin{aligned} \omega_1 &= k_1 [c_1 t - (\sin e_1 x - \cos e_1 z)], \\ \omega_2 &= k_2 [c_2 t - (\sin e_2 x - \cos e_2 z)], \\ \omega_3 &= k_3 [c_3 t - (\sin e_3 x + \cos e_3 z)], \\ \omega_4 &= k_4 [c_4 t - (\sin e_4 x + \cos e_4 z)], \end{aligned} \tag{12}$$

Here, subscripts 1, 2, 3 and 4 correspond to incident qP wave, incident qSV wave, reflected qP wave and reflected qSV wave, respectively.

In the x-z plane, the displacement and stress components due to the incident qP wave

$$\begin{aligned} (\Gamma_1^{(1)} = \sin e_1, \Gamma_3^{(1)} = -\cos e_1) \text{ are written as} \\ \mathbf{u}^{(1)} &= A_1 d_1^{(1)} e^{i\omega_1}, \\ \mathbf{w}^{(1)} &= A_1 d_3^{(1)} e^{i\omega_1}, \\ s_{13}^{(1)} &= iA_1 Q_4 k_1 [d_1^{(1)} \cos e_1 - d_3^{(1)} \sin e_1] e^{i\omega_1} \\ s_{33}^{(1)} &= iA_1 k_1 (Q_3 d_3^{(1)} \cos e_1 - Q_2 d_1^{(1)} \sin e_1) e^{i\omega_1} \end{aligned} \tag{13}$$

where,

$$\begin{aligned} Q_1 &= C_{11}^R + iC_{11}^I, Q_2 = C_{13}^R + iC_{13}^I, \\ Q_3 &= C_{33}^R + iC_{33}^I, Q_4 = C_{44}^R + iC_{44}^I. \end{aligned}$$

In the x-z plane, the displacement and stress components due to the incident qSV wave

$$\begin{aligned} (\Gamma_1^{(2)} = \sin e_2, \Gamma_3^{(2)} = -\cos e_2) \text{ are written as} \\ \mathbf{u}^{(2)} &= A_2 d_1^{(2)} e^{i\omega_2}, \\ \mathbf{w}^{(2)} &= A_2 d_3^{(2)} e^{i\omega_2}, \\ s_{13}^{(2)} &= iA_2 Q_4 k_2 [d_1^{(2)} \cos e_2 - d_3^{(2)} \sin e_2] e^{i\omega_2} \\ s_{33}^{(2)} &= iA_2 k_2 (Q_3 d_3^{(2)} \cos e_2 - Q_2 d_1^{(2)} \sin e_2) e^{i\omega_2} \end{aligned} \tag{14}$$

In the x-z plane, the displacement and stress components due to the reflected qP wave

$$\begin{aligned} (\Gamma_1^{(3)} = \sin e_3, \Gamma_3^{(3)} = -\cos e_3) \text{ are written as} \\ \mathbf{u}^{(3)} &= A_3 d_1^{(3)} e^{i\omega_3}, \\ \mathbf{w}^{(3)} &= A_3 d_3^{(3)} e^{i\omega_3}, \end{aligned}$$

$$s_{13}^{(3)} = -iA_3 Q_4 k_3 [d_1^{(3)} \cos e_3 + d_3^{(3)} \sin e_3] e^{i\omega_3},$$

$$s_{33}^{(3)} = -iA_3 k_3 [Q_3 d_3^{(3)} \cos e_3 + Q_2 d_1^{(3)} \sin e_3] e^{i\omega_3}, \tag{15}$$

In the x-z plane, the displacement and stress components due to the reflected qSV wave

($\Gamma_1^{(4)} = \sin e_4, \Gamma_3^{(4)} = \cos e_4$) are written as

$$\mathbf{u}^{(4)} = A_4 d_1^{(4)} e^{i\omega_4},$$

$$\mathbf{w}^{(4)} = A_4 d_3^{(4)} e^{i\omega_4}$$

$$s_{13}^{(4)} = -iA_4 Q_4 k_4 [d_1^{(4)} \cos e_4 + d_3^{(4)} \sin e_4] e^{i\omega_4},$$

$$s_{33}^{(4)} = -iA_4 k_4 (Q_3 d_3^{(4)} \cos e_4 + Q_2 d_1^{(4)} \sin e_4) e^{i\omega_4}, \tag{16}$$

The boundary conditions required to be satisfied at the free surface $z = 0$,

$$\Delta f_x = s_{13}^{(n)} + e_{13}^{(n)} P = 0, \tag{17}$$

$$\Delta f_z = s_{33}^{(n)} = 0,$$

The above boundary conditions are written as

$$s_{13}^{(1)} + s_{13}^{(2)} + s_{13}^{(3)} + s_{13}^{(4)} + P(e_{13}^{(1)} + e_{13}^{(2)} + e_{13}^{(3)} + e_{13}^{(4)}) = 0, \tag{18}$$

$$s_{33}^{(1)} + s_{33}^{(2)} + s_{33}^{(3)} + s_{33}^{(4)} = 0,$$

The Equations (11) to (16) will satisfy the boundary conditions (18), if the following Snell, s law holds

$$\frac{\sin e_1}{c_1} = \frac{\sin e_2}{c_2} = \frac{\sin e_3}{c_3} = \frac{\sin e_4}{c_4}, \tag{19}$$

and the following relations hold

$$A_1 \delta_1 + A_2 \delta_2 + A_3 \delta_3 + A_4 \delta_4 = 0, \tag{20}$$

$$A_1 \delta_5 + A_2 \delta_6 + A_3 \delta_7 + A_4 \delta_8 = 0, \tag{21}$$

where

$$\begin{aligned} \delta_1 &= k_1 L (d_1^{(1)} \cos e_1 - d_3^{(1)} \sin e_1), \\ \delta_2 &= k_2 L (d_1^{(2)} \cos e_2 - d_3^{(2)} \sin e_2), \\ \delta_3 &= -k_3 L (d_1^{(3)} \cos e_3 + d_3^{(3)} \sin e_3), \\ \delta_4 &= -k_4 L (d_3^{(4)} \sin e_4 + d_1^{(4)} \cos e_4), \\ \delta_5 &= k_1 (Q_3 d_3^{(1)} \cos e_1 - Q_2 d_1^{(1)} \sin e_1), \\ \delta_6 &= k_2 (Q_3 d_3^{(2)} \cos e_2 - Q_2 d_1^{(2)} \sin e_2), \\ \delta_7 &= -k_3 (Q_3 d_3^{(3)} \cos e_3 + Q_2 d_1^{(3)} \sin e_3), \\ \delta_8 &= -k_4 (Q_2 d_1^{(4)} \sin e_4 + Q_3 d_3^{(4)} \cos e_4), \end{aligned} \tag{22}$$

and $L = Q_4 + \frac{P}{2}$

1) For incident qP wave ($A_2 = 0$),

$$\frac{A_3}{A_1} = \frac{\delta_4\delta_5 - \delta_1\delta_8}{\delta_3\delta_8 - \delta_4\delta_7}, \quad \frac{A_4}{A_1} = -\frac{\delta_3\delta_5 - \delta_1\delta_7}{\delta_3\delta_8 - \delta_4\delta_7}, \quad (23)$$

2) For incident qSV waves ($A_1 = 0$),

$$\frac{A_3}{A_2} = \frac{\delta_4\delta_6 - \delta_2\delta_8}{\delta_3\delta_8 - \delta_4\delta_7}, \quad \frac{A_4}{A_2} = -\frac{\delta_3\delta_6 - \delta_2\delta_7}{\delta_3\delta_8 - \delta_4\delta_7}. \quad (24)$$

For isotropic case, $C_{11} = \lambda + 2\mu + P$, $C_{13} = \lambda$, $P = -S_{11}$, then, the above theoretical derivations reduce to Selim [14].

4. Numerical Example

For numerical purpose, a particular example of the material is chosen with the following physical constants,

$$\begin{aligned} C_{11}^R &= 2.628 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, & C_{33}^R &= 1.562 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, \\ C_{13}^R &= 0.508 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, & C_{44}^R &= 0.385 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, \\ C_{11}^I &= 1.025 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, & C_{33}^I &= 0.950 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, \\ C_{13}^I &= 0.425 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, & C_{44}^I &= 0.325 \times 10^{10} \text{ N} \cdot \text{m}^{-2}, \\ \rho &= 7.14 \times 10^3 \text{ kg} \cdot \text{m}^{-3}. \end{aligned}$$

From Equations (23) and (24), the reflection coefficients of reflected qP and qSV waves are computed for the incident qP and qSV waves. The numerical values of the reflection coefficients of reflected qP and qSV waves are shown graphically in **Figure 2** for incident qP wave and in **Figure 3** for incident qSV wave.

For $P = 0$, the reflection coefficient of reflected qP wave oscillates for the whole range of the angle of incidence of qP wave as shown by solid line in **Figure 2**. The variations of reflection coefficients of qP wave for $P = 1$ and $P = 2$ also change at each angle of incidence as shown by solid line with asters and solid lines with triangles, respectively. The comparison of the variations of reflection coefficients for $P = 0$, $P = 1$ and $P = 2$, shows the significant effect of initial stress on reflected qP wave for incident qP wave. Similarly, reflected qSV is also affected significantly due to the presence of initial stress as shown in **Figure 2**.

For incident qSV wave, the reflection coefficient of reflected qP wave first increases to its maximum value and then decreases to its minimum value at angle $e_2 = 45^\circ$ when $P = 0$. Thereafter, it oscillates as shown by solid line in **Figure 3**. The variations of reflection coefficients of qP wave for $P = 1$ and $P = 2$ are similar to that for $P = 0$. The comparison of solid line, solid line with asters and solid line with triangles shows the significant effect of initial stress on reflected qP wave for incident qSV wave. Similarly, reflected qSV is also affected significantly due to the presence of initial stress as shown in **Figure 3**.

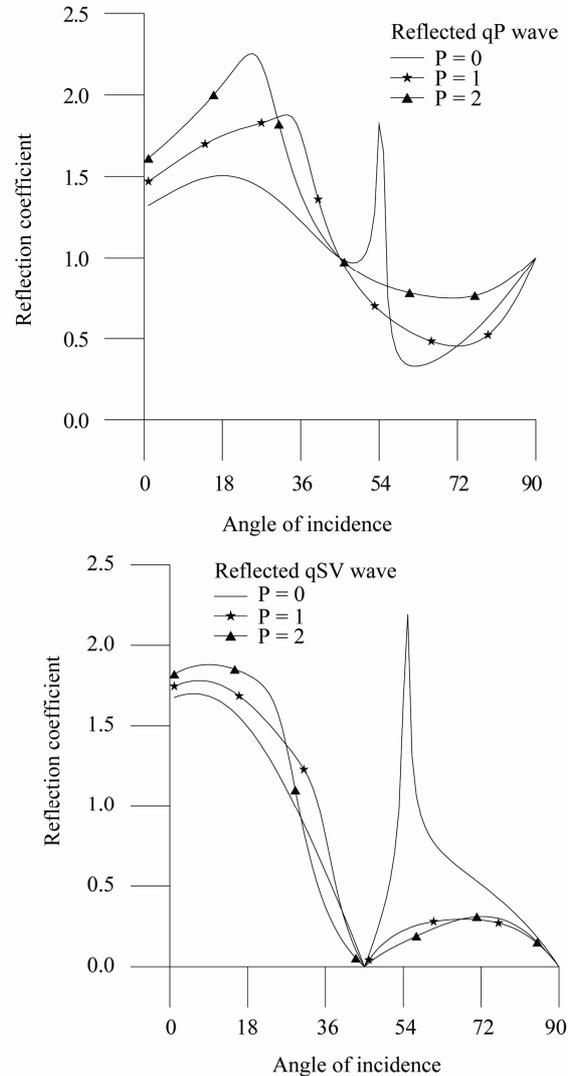


Figure 2. Variation of the reflection coefficients of qP and qSV waves against the angle of incidence for incidence of qP wave.

5. Conclusions

The reflection from the stress-free surface of a transversely isotropic dissipative medium is considered. The expressions for the reflection coefficients of reflected qP and qSV waves are obtained in closed form for the incidence of qP and qSV waves. For a particular material, these coefficients are computed and depicted graphically against the angle of incidence for different values of initial stress parameter. From the figures, it observed that 1) the initial stresses affect significantly the reflection coefficients of all reflected waves. 2) For incident qP wave, the critical angle for reflected qSV wave is observed at $e_1 = 45^\circ$ and for incident qSV wave, the critical angle for reflected qP wave is observed also at $e_2 = 45^\circ$. 3) The effect of initial stresses on the reflection coefficients is

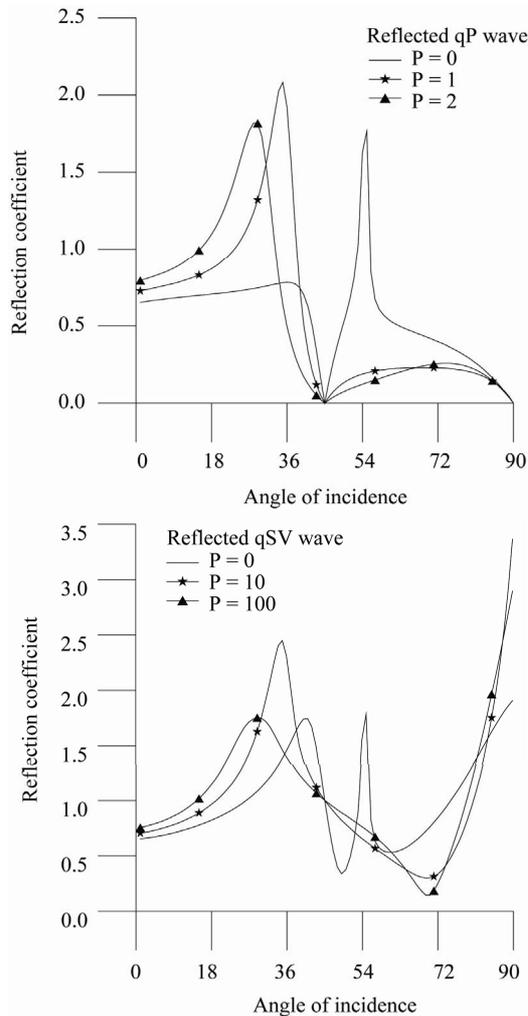


Figure 3. Variation of the reflection coefficients of qP and qSV waves against the angle of incidence for incidence of qP wave.

minimum at $e_1 = 45^\circ$ for incidence qP wave and at $e_2 = 45^\circ$ for incidence qSV wave.

6. References

- [1] S. B. Sinha, "Transmission of Elastic Waves through a Homogenous Layer Sandwiched in Homogenous Media," *Journal of Physics of the Earth*, Vol. 12, No. 1, 1999, pp. 1-4. [doi:10.4294/jpe1952.12.1](https://doi.org/10.4294/jpe1952.12.1)
- [2] R. N. Gupta, "Reflection of Plane Waves from a Linear Transition Layer in Liquid Media," *Geophysics*, Vol. 30, No. 1, 1965, pp. 122-131. [doi:10.1190/1.1439528](https://doi.org/10.1190/1.1439528)
- [3] R. D. Tooly, T. W. Spencer and H. F. Sagoci, "Reflection and Transmission of Plane Compressional Waves," *Geophysics*, Vol. 30, No. 4, 1965, pp. 552-570.
- [4] R. N. Gupta, "Reflection of Elastic Waves from a Linear Transition Layer," *Bulletin of the Seismological Society of America*, Vol. 56, 1966, No. 2, pp. 511-526. [doi:10.1190/1.1439622](https://doi.org/10.1190/1.1439622)
- [5] R. N. Gupta, "Propagation of SH-Waves in Inhomogeneous Media," *Journal of the Acoustical Society of America*, Vol. 41, No. 5, 1967, pp. 1328-1329. [doi:10.1121/1.1910477](https://doi.org/10.1121/1.1910477)
- [6] H. K. Acharya, "Reflection from the Free Surface of Inhomogeneous Media," *Bulletin of the Seismological Society of America*, Vol. 60, No. 4, 1970, pp. 1101-1104.
- [7] V. Cerveny, "Reflection and Transmission Coefficients for Transition Layers," *Studia Geophysica et Geodaetica*, Vol. 18, No. 1, 1974, pp. 59-68. [doi:10.1007/BF01613709](https://doi.org/10.1007/BF01613709)
- [8] B. M. Singh, S. J. Singh and S. D. Chopra, "Reflection and Refraction of SH-Waves and the Plane Boundary between Two Laterally and Vertically Heterogeneous Solids," *Acta Geophysica*, Vol. 26, 1978, pp. 209-216.
- [9] B. Singh, "Effect of Hydrostatic Initial Stresses on Waves in a Thermoelastic Solid Half-Space," *Applied Mathematics and Computation*, Vol. 198, No. 2, 2008, pp. 498-505.
- [10] M. D. Sharma, "Effect of Initial Stress on Reflection at the Free Surfaces of Anisotropic Elastic Medium," *Journal of Earth System Science*, Vol. 116, No. 6, 2007, pp. 537-551. [doi:10.1007/s12040-007-0049-8](https://doi.org/10.1007/s12040-007-0049-8)
- [11] S. Dey and D. Dutta, "Propagation and Attenuation of Seismic Body Waves in Initially Stressed Dissipative Medium," *Acta Geophysica*, Vol. XLV1, 1998, pp. 351-365.
- [12] M. M. Selim and M. K. Ahmed, "Propagation and Attenuation of Seismic Body Waves in Dissipative Medium under Initial and Couple Stresses," *Applied Mathematics and Computation*, Vol. 182, No. 2, 2006, pp. 1064-1074.
- [13] M. A. Biot, "Mechanics of Incremental Deformation," John Wiley and Sons Inc., New York, 1965.
- [14] M. M. Selim, "Reflection of Plane Waves at Free Surface of an Initially Stressed Dissipative Medium," *Recent Advances in Technologies*, Vol. 30, 2008, pp. 36-43.
- [15] Y. C. Fung, "Foundation of Solid Mechanics," Prentice Hall of India, New Delhi, 1965.