

Euler-Lagrange Elasticity with Dynamics

H. H. Hardy

Math and Physics Department, Piedmont College, Demorest, GA, USA
Email: hhardy@piedmont.edu

Received 10 October 2014; revised 12 November 2014; accepted 19 November 2014

Copyright © 2014 by author and Scientific Research Publishing Inc.
This work is licensed under the Creative Commons Attribution International License (CC BY).
<http://creativecommons.org/licenses/by/4.0/>



Open Access

Abstract

The equations of Euler-Lagrange elasticity describe elastic deformations without reference to stress or strain. These equations as previously published are applicable only to quasi-static deformations. This paper extends these equations to include time dependent deformations. To accomplish this, an appropriate Lagrangian is defined and an extrema of the integral of this Lagrangian over the original material volume and time is found. The result is a set of Euler equations for the dynamics of elastic materials without stress or strain, which are appropriate for both finite and infinitesimal deformations of both isotropic and anisotropic materials. Finally, the resulting equations are shown to be no more than Newton's Laws applied to each infinitesimal volume of the material.

Keywords

Elasticity, Stress, Strain, Infinitesimal Deformations, Finite Deformations, Discrete Region Model

1. Background

Virtually all modern theories of elasticity [1]-[4] build the equations to describe elasticity using stress and/or strain. Hardy [5] proposed to return to the approach of Euler, Lagrange, and Poisson [6] to build the equations of elasticity using point locations and forces instead of stress and strain. Hardy called these equations the equations of Euler-Lagrange elasticity. The equations of Euler-Lagrange elasticity are appropriate for quasi-static deformations, but do not include dynamics. Dynamics will be added in this paper.

Hardy defined an elastic material as one which when deformed, stores energy; and when it is returned to its original state, the stored energy is returned to its surroundings. This is known as hyper-elasticity [7]. Hardy followed the notation of Spencer [8] by defining the initial position of each point in an elastic material to be X_1 , X_2 , and X_3 corresponding to the x , y , and z coordinates of that point. The parameters, x_1 , x_2 , x_3 were defined as the x , y , z coordinates of the corresponding point after the deformation. The final position of each point depends upon the initial position, so that each component of each point, x_i , is a function of X_1 , X_2 ,

and X_3 . The energy of the material is a function of the final positions of each point x_i ($i = 1, 2, 3$) and the relative change in distances between points, $\frac{\partial x_i}{\partial X_j}$ (i and $j = 1, 2, 3$). This energy is expressed in terms of the energy per unit original volume, $E\left(x_i, \frac{\partial x_i}{\partial X_j}\right)$, which can be divided into the energy associated with body forces, $E_{\text{body}}(x_i)$, plus the energy associated with the deformation of the body, $E_{\text{def}}\left(\frac{\partial x_i}{\partial X_j}\right)$,

$$E = E_{\text{body}}(x_i) + E_{\text{def}}\left(\frac{\partial x_i}{\partial X_j}\right). \quad (1)$$

To obtain the Euler-Lagrange differential equations, Hardy minimized the total energy, \mathcal{E}_{tot} ,

$$\delta \mathcal{E}_{\text{tot}} = \delta \iiint E\left(x_i, \frac{\partial x_i}{\partial X_j}\right) dX_1 dX_2 dX_3 = 0, \quad (2)$$

which resulted in three Euler equations,

$$\frac{\partial E}{\partial x_i} - \frac{d}{dX_j} \frac{\partial E}{\partial \left(\frac{\partial x_i}{\partial X_j}\right)} = 0 \quad \text{for } i = 1, 2, 3. \quad (3)$$

The advantage of Hardy's approach is that Equation (3) is applicable to both infinitesimal and finite deformations as well as being appropriate for both anisotropic and isotropic materials. The disadvantage of this approach is that it is only appropriate for quasi-static deformations, since time dependence is not included. In this paper, I will extend this approach to include dynamics.

2. Adding Dynamics

To add dynamics to the Euler-Lagrange elasticity equations several changes are needed to the quasi-static approach. First define each x_i as a function of time as well as X_1 , X_2 , and X_3 . Second define an appropriate Lagrangian. Third minimize the integral of the Lagrangian over both space and time. Lagrangians for particle dynamics are defined as the kinetic energy minus the potential energy of the particle. To extend this to a distributed material, our "particle" will be an infinitesimal volume of the elastic material. Define the kinetic energy per original volume of the material as

$$T = \frac{1}{2} \rho v^2, \quad (4)$$

with ρ the mass per original volume of the material and the velocity of any point in the material, v , is

$$v^2 = \left(\frac{\partial x_1}{\partial t}\right)^2 + \left(\frac{\partial x_2}{\partial t}\right)^2 + \left(\frac{\partial x_3}{\partial t}\right)^2. \quad (5)$$

Define the potential energy per unit original volume as E in Equation (1) and the Lagrangian, \mathcal{L} as

$$\mathcal{L} = T - E. \quad (6)$$

Substitute Equation (1) into Equation (6) with $E_{\text{body}} = \rho g x_3$ and T from Equation (4) to express \mathcal{L} as

$$\mathcal{L} = \frac{1}{2} \rho \left(\left(\frac{\partial x_1}{\partial t}\right)^2 + \left(\frac{\partial x_2}{\partial t}\right)^2 + \left(\frac{\partial x_3}{\partial t}\right)^2 \right) - \rho g x_3 - E_{\text{def}}\left(\frac{\partial x_i}{\partial X_j}\right). \quad (7)$$

Now find the extrema of

$$\mathcal{M} = \iiint \mathcal{L} dX_1 dX_2 dX_3 dt. \quad (8)$$

Since $\mathcal{L} = f\left(x_i, \frac{\partial x_i}{\partial X_j}, \frac{\partial x_i}{\partial t}\right)$, the following three Euler equations result from setting $\delta\mathcal{M} = 0$:

$$\frac{\partial \mathcal{L}}{\partial x_i} - \frac{d}{dX_j} \frac{\partial \mathcal{L}}{\partial (\partial x_i / \partial X_j)} - \frac{d}{dt} \frac{\partial \mathcal{L}}{\partial (\partial x_i / \partial t)} = 0. \quad (9)$$

Substituting \mathcal{L} from Equation (7) gives

$$-\rho g \delta_{i3} + \frac{d}{dX_j} \left(\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)} \right) - \frac{d}{dt} \left(\rho \frac{\partial x_i}{\partial t} \right) = 0, \quad (10)$$

or

$$\frac{d}{dt} \left(\rho \frac{\partial x_i}{\partial t} \right) = -\rho g \delta_{i3} + \frac{d}{dX_j} \left(\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)} \right). \quad (11)$$

Equation (11) are the equations of dynamics for deformation of elastic materials. All that is required is to define E_{def} of the material experimentally. The E_{def} must be invariant under coordinate rotations and translations. One method is to define E_{def} in terms of invariants of the $\frac{\partial x_i}{\partial X_j}$ matrix (e.g. Ogden [9], Hardy [10]).

Note that no assumptions of infinitesimal deformation or isotropy have been made to derive Equation (11), so they are applicable for both infinitesimal and finite deformations of both isotropic and anisotropic materials. The most surprising thing about Equation (11) is that each term in Equation (11) can be given a simple physical interpretation.

3. Physical Interpretation of the Terms in Equation (11)

In order to give a physical interpretation to the individual terms in Equation (11) consider a small cuboid defined as $\Delta X_1 \Delta X_2 \Delta X_3$. The term on the left hand side of Equation (11), $\frac{d}{dt} \left(\rho \frac{\partial x_i}{\partial t} \right)$, is the change in momentum per unit original volume of this cuboid with respect to time in the limit as ΔX_1 , ΔX_2 and ΔX_3 approach 0. The first term on the right hand side, $-\rho g \delta_{i3}$, is the force of gravity per unit original volume of this cuboid in the same limit. The second term on the right hand side, $\frac{d}{dX_j} \left(\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)} \right)$, is shown below to be the net surface force per unit original volume applied to all the surfaces of the cuboid as the volume of the cuboid shrinks to zero. In other words, Equation (11) is just an expression of Newton's laws $\left(\sum \mathbf{F} = \frac{d\mathbf{p}}{dt} \right)$ for each infinitesimal volume of the material.

To see that $\frac{d}{dX_j} \left(\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)} \right)$ is indeed the net surface force per unit original volume acting on the cuboid,

recall that Hardy [5] found that the external force acting on a surface can be written as

$$dF_i = \frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)} dA_j. \quad (12)$$

Let $d\mathbf{a}$ represent a particular plane during deformation, where the magnitude of $d\mathbf{a}$ is the current infinitesimal area of the plane and the direction of $d\mathbf{a}$ is perpendicular to the plane of interest and pointing away from the material receiving the force. To calculate the force on this plane using Equation (12), find the original magnitude and direction of $d\mathbf{a}$ before the deformation. Call this $d\mathbf{A}$. Define the components of $d\mathbf{A}$

be da_1 , da_2 , and da_3 in the X_1 , X_2 , and X_3 directions respectively. The three components of the force exerted on the da plane at any time during the deformation are then calculated from Equation (12) as

$$dF_i = \frac{\partial E_{def}}{\partial(\partial x_i / \partial X_1)} da_1 + \frac{\partial E_{def}}{\partial(\partial x_i / \partial X_2)} da_2 + \frac{\partial E_{def}}{\partial(\partial x_i / \partial X_3)} da_3. \quad (13)$$

For our cuboid, defined as $\Delta X_1 \Delta X_2 \Delta X_3$, the i^{th} component of the force on a plane of the cuboid originally perpendicular to X_j is F_{ij} , where

$$F_{ij} = \frac{\partial E_{def}}{\partial(\partial x_i / \partial X_j)} da_j \text{ (not summed over } j \text{)}. \quad (14)$$

For example, F_{33} is the X_3 component of the force on plane $da_3 = dX_1 dX_2$. Divide the body into cuboids along the X_3 direction as shown in **Figure 1(a)**. As shown in this figure, $F_{33}(X_3)$ is the component of force on region a from region b in the X_3 direction. $F_{33}(X_3 + \Delta X_3)$ is the component of force on region b from region c. If we wish to express the net force on region b alone, this would be $F_{33}(X_3 + \Delta X_3) - F_{33}(X_3)$ as shown in **Figure 1(b)**. The net force in the X_3 direction on region b along the X_3 direction when divided by the cuboid's original volume is

$$\begin{aligned} \frac{F_{33}(X_3 + \Delta X_3) - F_{33}(X_3)}{\Delta X_1 \Delta X_2 \Delta X_3} &= \frac{\left(\frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)} \right)_{X_1, X_2, X_3 + \Delta X_3} \Delta X_1 \Delta X_2}{\Delta X_1 \Delta X_2 \Delta X_3} - \frac{\left(\frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)} \right)_{X_1, X_2, X_3} \Delta X_1 \Delta X_2}{\Delta X_1 \Delta X_2 \Delta X_3} \\ &= \frac{\left(\frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)} \right)_{X_1, X_2, X_3 + \Delta X_3} - \left(\frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)} \right)_{X_1, X_2, X_3}}{\Delta X_3}. \end{aligned} \quad (15)$$

Taking the limit as the dimensions of the cube go to zero gives the net force per unit original volume on region b in the X_3 direction on the da_3 faces of the cube, F_{33}^{net} , to be

$$\begin{aligned} F_{33}^{net} &= \lim_{\Delta X_1, \Delta X_2, \Delta X_3 \rightarrow 0} \frac{F_{33}(X_3 + \Delta X_3) - F_{33}(X_3)}{\Delta X_1 \Delta X_2 \Delta X_3} \\ &= \lim_{\Delta X_3 \rightarrow 0} \frac{\left(\frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)} \right)_{X_1, X_2, X_3 + \Delta X_3} - \left(\frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)} \right)_{X_1, X_2, X_3}}{\Delta X_3} \\ &= \frac{d}{dX_3} \frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_3)}. \end{aligned} \quad (16)$$

A similar argument using F_{11} and F_{22} yields the net forces normal to the da_1 and da_2 faces, F_{11}^{net} and F_{22}^{net} , to be

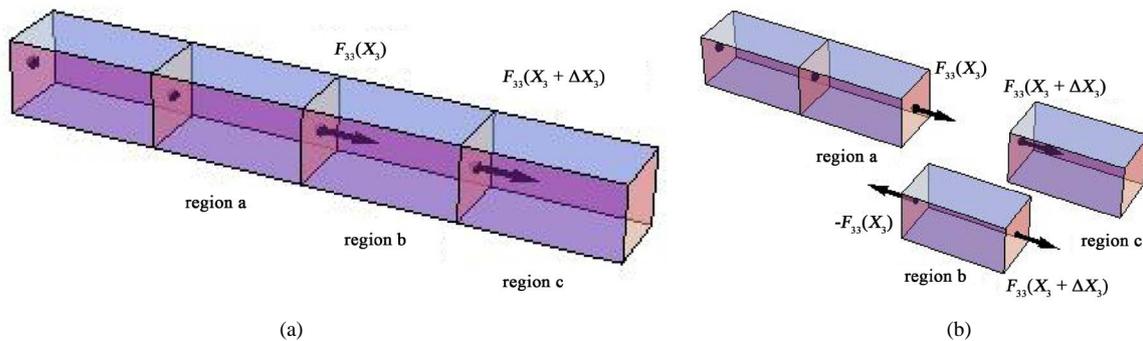


Figure 1. Force within the material in the X_3 direction on the da_3 surfaces (a) internal forces from Equation (14) (b) forces on region b.

$$F_{11}^{net} = \frac{d}{dX_1} \frac{\partial E_{def}}{\partial(\partial x_1 / \partial X_1)}, \tag{17}$$

and

$$F_{22}^{net} = \frac{d}{dX_2} \frac{\partial E_{def}}{\partial(\partial x_2 / \partial X_2)}. \tag{18}$$

Next consider F_{32}^{net} . Using **Figure 2** and an argument similar to the one used in **Figure 1** gives

$$F_{32}^{net} = \frac{d}{dX_2} \frac{\partial E_{def}}{\partial(\partial x_3 / \partial X_2)}, \tag{19}$$

and in general

$$F_{ij}^{net} = \frac{d}{dX_j} \frac{\partial E_{def}}{\partial(\partial x_i / \partial X_j)} \quad (\text{not summed over } j). \tag{20}$$

Combining these results, we have the total force in the X_i direction to be

$$F_i^{net} = \frac{d}{dX_j} \left(\frac{\partial E_{def}}{\partial(\partial x_i / \partial X_j)} \right), \tag{21}$$

for $i = 1, 2, 3$, and summed over $j = 1, 2, 3$, which is the third term in Equation (11). Thus $\frac{d}{dX_j} \left(\frac{\partial E_{def}}{\partial(\partial x_i / \partial X_j)} \right)$

is the net surface force per unit original volume in the i^{th} direction on any cuboid in the limit as the cuboid dimensions shrink to zero.

Figure 3 summarizes this result by illustrating the forces summed in each direction to calculate the net surface force on a cuboid of material. Note that in **Figure 3** only the forces on the “front” faces of the cuboid are

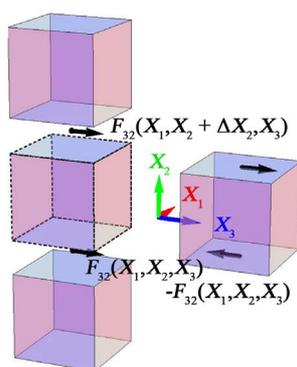


Figure 2. Forces in the X_3 direction on the two dA_2 faces within the material and on a region.

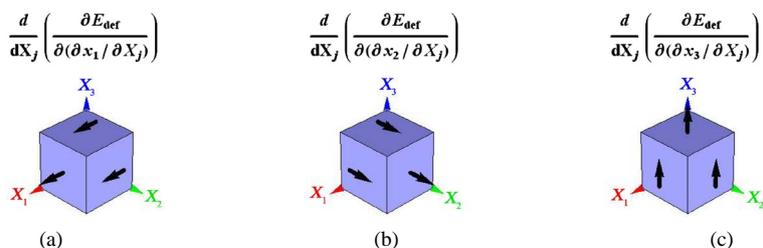


Figure 3. Forces in each direction on surfaces of cuboid (forces on the back sides not shown). (a) Surface forces in the X_1 direction; (b) Surface forces in the X_2 direction; (c) Surface forces in the X_3 direction.

shown. There are forces on the rear surfaces that also contribute to each F_i^{net} term.

4. Some Details

The procedure outlined in the last section to calculate the force on a plane after a deformation seems a bit convoluted in that the location of the plane before any deformation must be found in order to find the force on the plane after deformation. However, Equation (12) are excellent for applying Neumann boundary conditions to Equation (11). As an example, consider the case of deforming a rectangular body as shown in **Figure 1(a)** by applying some force on the X_3 face of the cuboid. If we know the components of the applied force from boundary conditions as a function of time, we can write

$$F_i = \int \frac{\partial E_{def}}{\partial (\partial x_i / \partial X_3)} dA_3. \quad (22)$$

If the force is applied uniformly over the area, dF_i/dA_3 is simply the applied force divided by a constant, the original area. Therefore the Neumann boundary condition using Equation (12) is defined using just a rescaled version of the applied force on the surface of the material.

Finite deformations may displace and distorted planes in the cuboid from their original positions, but as long as inversions are not allowed, the same bounding surfaces of the cuboid are found regardless of how the material

is deformed. The values of $\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)}$ change from point to point as the material is deformed, but the dA_j

vectors are unchanged by the deformation. Thus the forces shown in **Figures 1-3** may be displaced due to the finite deformation, but the orientation of each component of each force from each surface is the same and the

form of the sum of the forces, $\frac{d}{dX_j} \frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)}$, is unchanged by the displacement.

Lastly, it is tempting to consider the second order tensor quantity $\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)}$ to be stress, but it is only stress for infinitesimal deformations. This is because $\frac{\partial E_{def}}{\partial (\partial x_i / \partial X_j)}$ must be multiplied by the ORIGINAL surface vector, not the current one to get the force at the current location.

5. Conclusion

The equations for dynamics in Euler-Lagrange elasticity have been derived. These equations are shown to be a simple statement of Newton's Law $\left(\sum \mathbf{F} = \frac{d\mathbf{p}}{dt} \right)$ for each infinitesimal volume of the material. The derived equations, Equation (11), are applicable to infinitesimal and finite deformations for both isotropic and anisotropic materials.

References

- [1] Maugin, G.A. (2013) Continuum Mechanics through the Twentieth Century. Springer, London. <http://dx.doi.org/10.1007/978-94-007-6353-1>
- [2] Truesdell, C. and Noll, W. (2009) The Non-Linear Field Theories of Mechanics. Springer, London.
- [3] Srinivasa, A.R. and Srinivasan, S.M. (2004) Inelasticity of Materials. World Springer, New York.
- [4] Pedregal, P. (2000) Variational Methods in Nonlinear Elasticity. Siam, Philadelphia.
- [5] Hardy, H.H. (2013) Euler-Lagrange Elasticity: Differential Equations for Elasticity without Stress or Strain. *Journal of Applied Mathematics and Physics*, **1**, 26-30.
- [6] Todhunter, I. (1886) A History of the Theory of Elasticity and of the Strength of Materials from Galileo to the Present Time. Vol. 1, Cambridge University Press, New York.
- [7] Shabana, A.A. (2008) Computational Continuum Mechanics. Cambridge University Press, New York, 131. <http://dx.doi.org/10.1017/CBO9780511611469.005>

- [8] Spencer, A.J. (1980) *Continuum Mechanics*. Dover, Mineola, New York.
- [9] Ogden, R.W. (1984) *Non-Linear Elastic Deformations*. Dover, Mineola, New York.
- [10] Hardy, H.H. and Schmidheiser, H. (2011) A Discrete Region Model of Isotropic Elasticity. *Mathematics and Mechanics of Solids*, **16**, 317-333. <http://dx.doi.org/10.1177/1081286510391666>

Scientific Research Publishing (SCIRP) is one of the largest Open Access journal publishers. It is currently publishing more than 200 open access, online, peer-reviewed journals covering a wide range of academic disciplines. SCIRP serves the worldwide academic communities and contributes to the progress and application of science with its publication.

Other selected journals from SCIRP are listed as below. Submit your manuscript to us via either submit@scirp.org or [Online Submission Portal](#).

