

Modeling the Mangla Dam Spillway for Cavitation and Aerators Optimization*

Mohammad Rafi¹, Akhtar Ali^{2#}, Ghulam Qadir³, Rafaquat Ali¹

¹Water Resources Division, National Engineering Services of Pakistan (NESPAK), Lahore, Pakistan

²Asian Development Bank, Manila, Philippines

³WAPDA Model Study Cell, Irrigation Research Institute, Irrigation Secretariat, Lahore, Pakistan

Email: #akhtar_rm@yahoo.com

Received September 15, 2012; revised October 16, 2012; accepted October 23, 2012

ABSTRACT

This study evaluated the effects of increased reservoir conservation level by 40 ft (12.2 m), on spillway velocities; its discharging capacity and associated cavitation risk. The study optimized the aerators size and shape to avoid cavitations. The mathematical model was used to estimate the flow velocities and cavitation risk, when scale model study assessed the spillway discharging capacity and optimized the performance of the aerators for modified conditions. The mathematical model simulations showed increased flow velocities and damage index for modified conditions. The damage potential was 2 - 3 times higher with modifications and falls within the major to catastrophic region. The scale model study showed that discharging capacity of the spillway can effectively be restricted to original design by raising spillway crest by 5.0 ft (1.52 m). The scale model study also showed that the two aerators near sluice and at the chute with an air duct pipe of 3.0 ft diameter can improve the free surface flow profile reducing the risks of cavitation. Simulations for several configurations demonstrated clearer affect of aerators ramps on flow trajectory and gate opening. It also depicted that the height of the ramp of sluice aerator has a positive effect on the flow performance to about 7.5 inches (19 cm), when further increase in the ramp height reduced the flow performance.

Keywords: Spillway; Model Studies; Discharging Capacity; Cavitation Risk; Aerators Optimization

1. Introduction

High flow velocities can induce cavitations and cause serious damages to the spillways of high dams. Formation of flow bubbles indicates spillway surface deformation [1]. Increasing flow velocities and as a result decreasing pressures may pass through a critical value initiating cavitation, which is known as *incipient* cavitation. Conversely, decreasing velocity resulting in increasing pressure may arrive to a point to disappear cavitation and is called *desinent* cavitation. Surface roughness of spillway floor and water impurities aggravate cavitations, accelerate damages and can result in spillway failure.

Interactions between the flowing water and the atmosphere may lead to significant air-water mixing and complex multiphase flow situation [2,3]. The cavitation can be prevented either reducing the flow velocity or increasing the flow pressure or with combination of both. The studies on the effect of variable spillway width and invert curvature on the flow pressure for Amaluza dam

spillway in USA indicated that dispersion of a small amount of air through water prism can significantly reduce for the risks of cavitation damage [4]. It was found that about 7.5% of air by volume was needed to stop cavitation damages in a 28-day concrete surface with a compressive strength of 17 mega-Pascals [5]. The required air quantity to protect a spillway surface from cavitation increases with decrease in surface strength [6]. Application of aerators to prevent cavitation damage was successfully tested for Grand Coulee Dam in USA [7].

Bottom aerators are provided when natural aeration of the high velocity spillway chute does not satisfy the minimum air concentration requirements to develop positive pressures. The aerators for the first time were tested at Yellowtail dam following high discharges in 1967 [8]. The minimum air concentration is function of Froude Number [9].

$$\bar{C}_{90\min} = 0.015 \left[\frac{F_0 + F_{C\min}}{2} \right] \quad (1)$$

where $\bar{C}_{90\min}$ is minimum air concentration, F_0 inflow Froude number and $F_{C\min}$ is Froude number at the inception point.

*Disclaimer: The ideas and finding presented in this paper are of the authors and do not necessarily reflect the views and policies of the organizations, they belong.

#Corresponding author.

Mangla dam reservoir in Pakistan has a gross storage capacity of 5.88 millions AF (7.25 km³), it supplies irrigation water to over 4 million ha and can generate up to 1000 mega watt of electricity. The dam's reservoir area of 100 mi² (160 km²) creates a live storage capacity of 5.34 millions AF (6.58 km³). Since its inception in 1967, the reservoir sedimentation has reduced its storage capacity by 20% or 1.15 MAF (1.42 km³). The reduced water storage implicated water shortages for irrigation and hydropower. The studies indicated that increasing the dam height by 30 ft (9.5 m) and the reservoir conservation level (RCL) by 40 ft from 1202 to 1242 ft is possible and it can refurbish the lost capacity [10]. Nevertheless, raising the dam height and RCL can increase the spillway discharge, discharge intensities and flow velocities, which may cause spillway cavitations and structural damages. This study 1) checked the effect of raised dam height and the reservoir conservation level on the spillway discharge, discharge intensities and velocities through hydraulic design computations; 2) tested the effect of different gate openings and reduced orifice areas on spillway discharge, discharge intensities and velocities on a scale model; 3) assessed the cavitation risk due to increased velocities by using a mathematical model and 4) optimized the size and shape of the bottom aerator for reduced cavitation risk by using the scale model.

2. Material and Methods

2.1. Mangla Dam Spillway

The Mangla dam embankment is 380 ft (115.83 m) high above river bed and 10300 ft long (3140 m) long. It was proposed to raise the embankment height by 30 ft (9.14 m) and pool conservation level by 40 ft (12.20 m). The dam spillway is orifice type headworks, two-stage stilling basin and sloping side walls. The headworks of the main spillway are 444 ft (135.33 m) long. It consists of three monoliths separated by 24 ft (7.3 m) wide piers. Each monolith comprised three orifices of 36 ft (10.97 m) width and 40 ft (12.2 m) height, which are equipped with radial gates. Each orifice within the monoliths is separated by 12 ft (3.66 m) wide pier. Parabolic chute follows the headworks crest. An intermediate weir divides the chute into two and creates a stilling basin and water pool at an elevation of 1000 ft (304.8 m). The spillway plan and the longitudinal sections are in **Figure 1**.

2.2. Spillway's Hydraulic Design

In the original design, the probable maximum flood (PMF) discharge was fixed as 1.01 million ft³·sec⁻¹ (28,600 m³·sec⁻¹) and the discharge intensities over the upper and lower chutes were fixed as 2275 ft³·sec⁻¹·ft⁻¹ (211.4 m³·sec⁻¹·m⁻¹) and 1443 ft³·sec⁻¹·ft⁻¹ (134 m³·sec⁻¹·m⁻¹), respectively. The hydraulic design computations showed

that the raised dam height and RCL may increase the maximum discharge through the existing spillway to 1.31 million ft³·sec⁻¹ (37,095 m³·sec⁻¹)—27% higher than the original design discharge and corresponding increase in discharge intensities and flow velocities. The design considered reducing the orifice area to restrict the spillway discharge and discharge intensities within the original design limits. The hydraulic computations showed that raising the floor level of the spillway crest by 5 ft (1.524 m) from 1086 to 1091 ft can reduce the orifice area to control the spillway discharge to original design limits. Therefore, the hydraulic design suggested raising the invert level by 5 ft to the end of gate piers with 2 ft high ramp at an angle of 10 degree from end (**Figure 2**). This modification¹ may have only reduced the spillway discharge to the original design limit, but not the flow velocities, as the velocities are function of total head across. Hydraulic design computations for the proposed modifications indicated that the flow velocities are likely to exceed from original designed velocity of 100 ft·sec⁻¹ (30.48 m·sec⁻¹). This increase in velocity could induce cavitation risk in the sluice bays and on the parabolic chute.

2.3. Mathematical Model and Cavitation Risks

The cavitation risk due to increased flow velocities along the spillway chute were assessed by using a mathematical model-USBR-EM42 [1]. The cavitation risk to a hydraulic structure is function of flow velocities, hydrodynamic pressures and surface irregularities. Mathematically, the pressure coefficient (C_p)—basis for the cavitation index, can be derived from the Bernoulli equation for conditions that reference elevation is equal to the elevation in question.

$$C_p = \frac{P - P_0}{\rho V^2 / 2} \quad (2)$$

where P and P_0 pressure intensity and reference pressure and V_0 is reference velocity considering elevation difference is negligible. The pressure coefficient or pressure parameter is also referred as *Euler number*. Damage index was assumed as a quasi-quantitative measure of the severity of the cavitation damage as a function of discharge and time. It can be used to differentiate between minor and major damages. The model computes the cavity damage index from

$$D_i = D_p \ln(t - t_0) \quad (3)$$

$$t_0 = t_c - e^{(D_i/D_p)} \quad (4)$$

where, t_c is cumulative time of operation, D_i is damage

¹The overall modifications include raising the dam height and reservoir conservation level, raising the spillway invert level by 5 ft and introduction of bottom aerator.

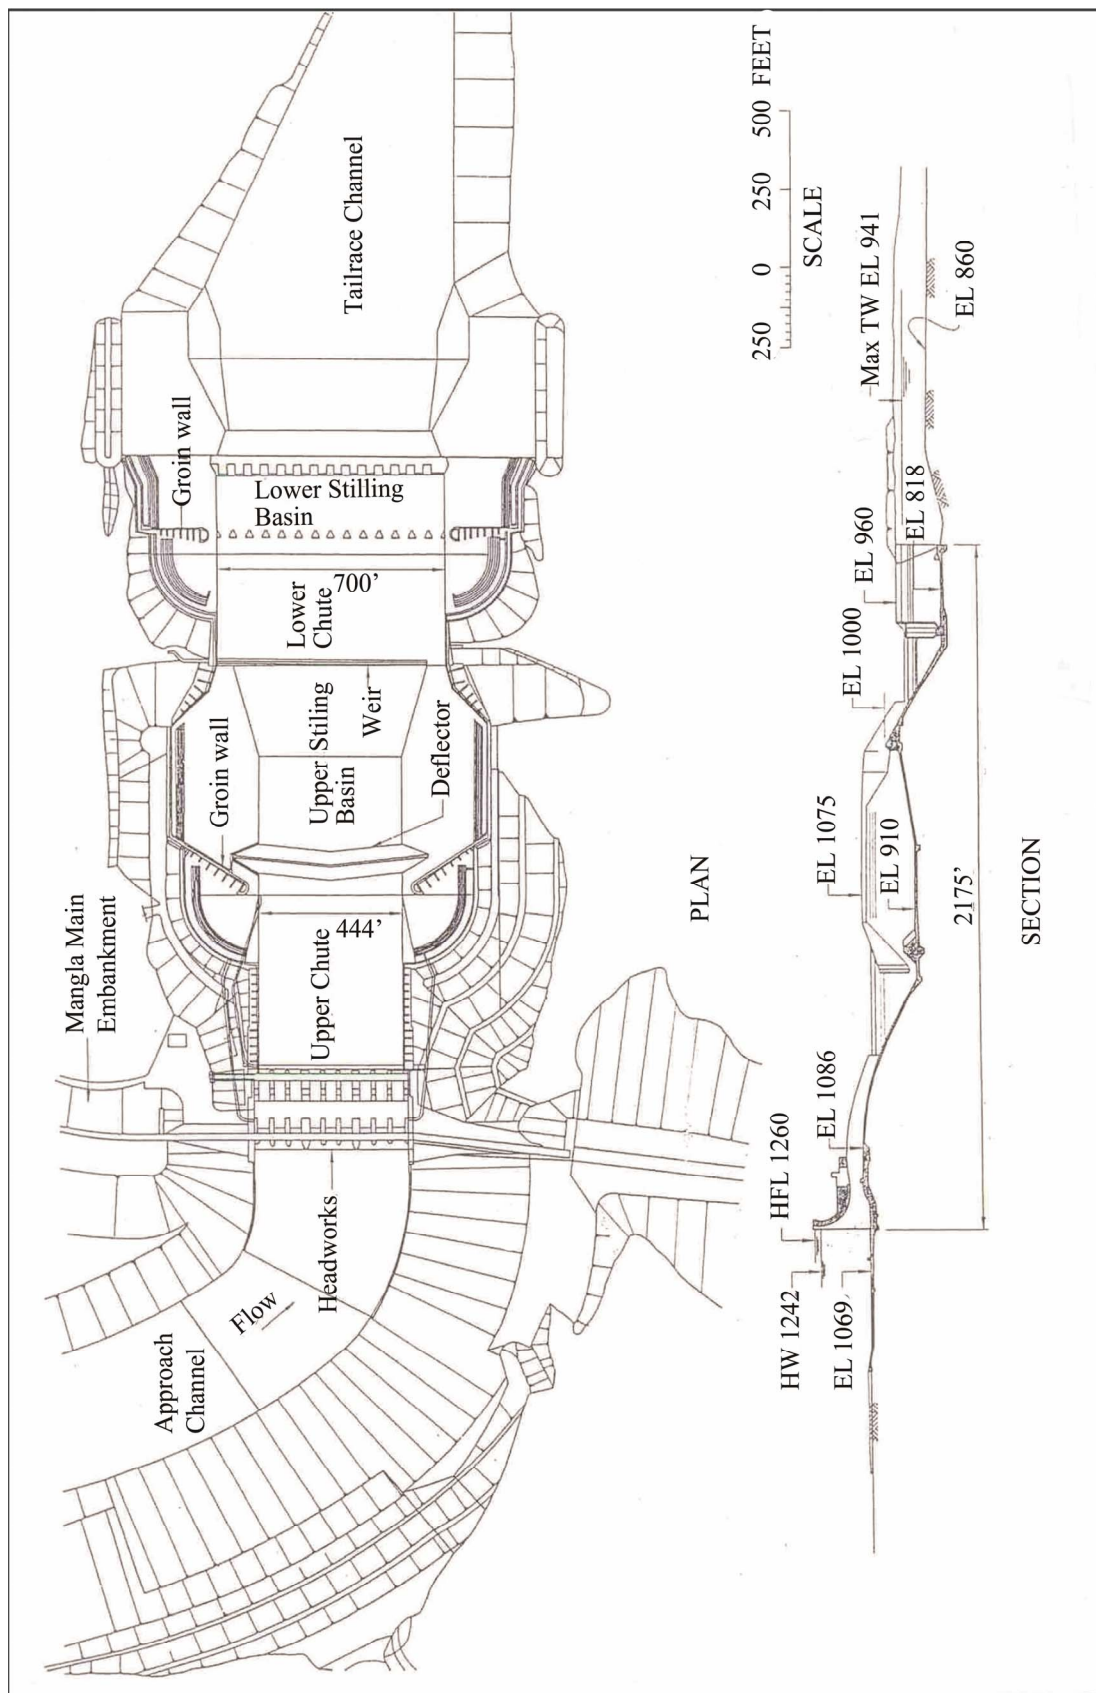


Figure 1. Plan and longitudinal section of Mangla spillway.

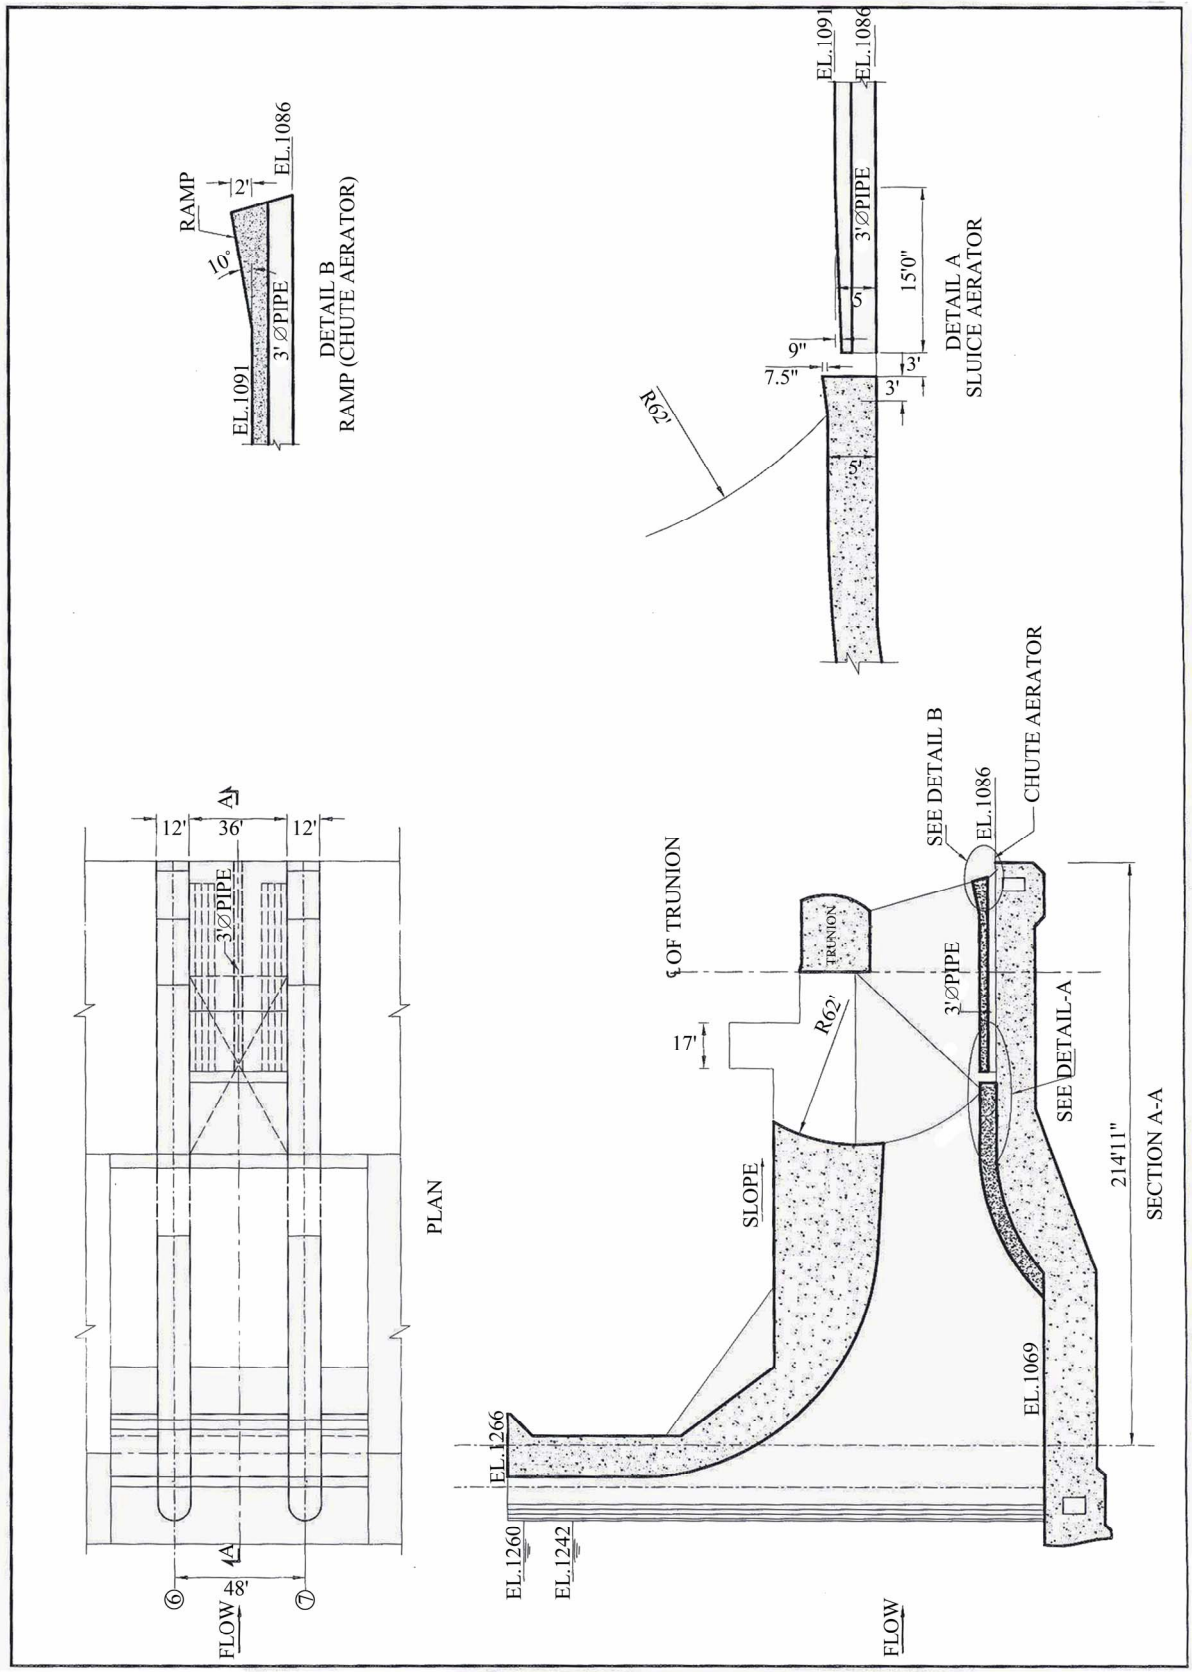


Figure 2. Sectional model of modified spillway and sluice and chute aerators.

index at end of previous discharge, D_p is damage potential for next discharge. The integrating constant t_0 allows the equation to incorporate the cumulative effect of flow at various discharges. At the start of operation, $D_i = 0$ at $t_c = 0$ and $t_0 = -1$. Damage potential D_p in Equation (2) was computed from

$$D_p = \left(\frac{1}{\sigma_s} \right) \left(\frac{\sigma_s}{\sigma_f} - 1 \right) \left(\frac{V}{V_r} \right)^6 \quad (5)$$

where, σ_s is cavitation index for initiation of damages, σ_f is cavitation index of the flow and V and V_r are flow and reference velocities, respectively. The model sets cavitation index “ σ ” equal to pressure coefficient with minus sign in Equation (3) ($\sigma = -C_p$).

The spillway chute was divided into 22 sections longitudinally created by 23 station points to determine the locations of highest flow velocity and cavitation. Damage potential and damage risks were assessed for incipient, major and catastrophic damages from the criteria given in **Table 1**.

2.4. The Scale Model

The scale model was built and operated at Hydraulic Research Station, Nandi Pur, Pakistan. The scale model was used to verify the spillway discharge and velocities and to test the various options of the bottom aerators to reduce cavitation risk. A sectional model of the main spillway was constructed on an undistorted scale of 1:36 (**Figure 2**). It comprised of 2 bays—one full central bay and two half bays on either side of the central bay. The model included a portion of the reservoir, proportionate central part of the approach channel, headworks, radial gates, hoisting arrangement, parabolic chute and upper stilling basin and weir. The model was fabricated in transparent Perspex in order to minimize the frictions and facilitate visual observation.

A suppressed sharp-crested rectangular weir of 9 ft (2.74 m) length and 5 ft (1.52 m) height was constructed at immediately downstream of the sectional model to determine the stage-discharge relationship of the modified spillway (with 5 ft rise in invert level) for the following conditions.

- Discharge for different reservoir levels with fully opened gates (35 ft opening means full open gate).

Table 1. Damage potential and damage index criteria (after Falvey, 1990).

Damages	Damage potential	Damage index
Incipient	500	5000
Major	1000	10,000
Catastrophic	2000	20,000

- Discharge for variable gate openings (5, 10, 15, 20, 25 and 30 ft); with reservoir level maintained at 1242 ft.
- Discharge for variable gate openings (5, 10, 15, 20, 25 and 30 ft); with reservoir level maintained at 1260 ft.

Francis formula was used to compute discharge from the observed water levels on the weir.

$$Q = 0.171L \left[(H + h_a)^{3/2} - h_a^{3/2} \right] \quad (6)$$

where, Q is discharge in $\text{m}^3 \cdot \text{sec}^{-1}$, L is length of the weir in m; H is head on weir crest in m and h_a is approach velocity head in m.

A scale of 1:36 was used for geometric similitude between the model and the prototype. In free surface flows, most laboratory studies are based on a Froude similitude since gravity effects are important [11,12]. The same concept was used in this study, but due to scale effect, it may not be able to achieve true dynamic similarity. In fact in geometrical similarity models, it may not be possible to satisfy simultaneously Froude and Reynolds similarities unless at full scale [13]. Froudian equations represented the mathematical relationship between dimensional and hydraulic quantities of the model and prototype.

$$F_r = \frac{V^2}{gh} \quad (7)$$

$$F_{rM} = \frac{V_M^2}{g_M h_M} = F_{rP} = \frac{V_P^2}{g_P h_P} \quad (8)$$

where F_r is Froude number, V is velocity, g is gravitational force and h is head of water column. Subscripts M and P represents model and prototype respectively. The relationships for the transference of model data to prototype equivalents are given **Table 2**.

2.5. Aerators Optimization

The aerators entrained air into the flow through side ducts due to the pressure difference. This arrangement generally functions effectively except for submergence

Table 2. Mathematical relationships for dimensional and hydraulic quantities.

Dimension	Ratio	Scale Relations
Length	L_r	1:36
Time	$T_r = L_r^{1/2}$	1:6
Velocity	$V_r = L_r^{1/2}$	1:6
Discharge	$Q_r = L_r^{3/2}$	1:7776
Pressure	$P_r = L_r$	1:36
Roughness (Manning's n)	$n_r = L_r^{1/6}$	1:1.82

conditions, which may reduce the aerators effectiveness. The aerators in this study consist of a ramp, circular air duct under the horizontal floor and an air supply gallery. The ramp was likely to create sub-pressure region by lifting up the high velocity water jet above the chute floor. The scale model study optimized the aerators parameters, evaluated the air entrainment and checked the performance of the spillway with modified design. Two aerators at sluice gate and end of horizontal floor were tested for several combinations including pipes of 2.25 ft (0.70 m) and 3 ft (0.91 m) diameters and for different ramp heights (Table 3). The pipes connected the air duct with the 5 ft (1.52 m) high vertical step at the raised floor end. The flow velocity on the model was measured by using Kempton probes. Graduated staff gauges were used to measure the water levels at different sections of the model. Validyne transducers were used to measure the pressures that recorded magnified signals on strip chart recorder.

3. Results

3.1. Spillway Discharge Capacity

The spillway stage-discharge relationship at full gate opening and with modifications was superimposed on the original spillway rating determined in 1967 at the time of the dam construction (Figure 3). It shows that the stage-discharge relationship in both the cases with and without modifications reasonably match and falls on the projected original rating. Results showed that discharging

capacity of the modified spillway was within the design limits of its original capacity at maximum pool level of 1260 ft and it was about 0.16% higher at modified reservoir conservation level of 1242 ft (Table 4). Insignificant increase in discharging capacity of the modified spillway at the reservoir conservation level was less likely to negatively impact the hydraulic performance of the energy dissipaters. The results based on scale-model study indicated that the proposed raising of the crest level by 5 ft can effectively curtail the spillway discharging capacity to its original design level.

3.2. Cavitation Risk

Mathematical model study showed that velocities vary from 100 ft·sec⁻¹ to 125 ft·sec⁻¹ (30.48 to 38.1 m·sec⁻¹) for different discharges at the lower part of the chute near the toe under existing conditions. It showed a velocity up to 138 ft·sec⁻¹ for a discharge of one million ft³·sec⁻¹ with modified conditions. This velocity is most likely to create cavitation. The logarithmic equations with an r² value of 0.95 reasonably fit to the discharge velocity relationship for both existing and modified conditions (Figure 4). However, the trend lines show scatter between -5% and 18% under existing conditions and between -5% and 23% for modified conditions. The cavitation risks were estimated by damage potential and damage index under existing and with modifications. It shows that damage potential for existing spillway were below 600, which sharply increases up to discharge of

Table 3. Aerators parameters tested on the scale model for gate opening of 5, 10, 15, 20, 25, 30 and 35 ft (gates fully open).

Run no	Chute aerator	Sluice aerator
	Base length = 11.3 ft (3.44 m)	Base length = 3.0 ft (0.91 m)
	<i>Air duct pipe diameter = 2.25 ft (0.68 m)</i>	
Run 1: base case	No ramp	No ramp
Run 2	Ramp of 2 ft height and 10° back slope	No ramp
	<i>Air duct pipe diameter = 3.0 ft (0.91 m)</i>	
Run 3	Ramp of 2 ft height and 10° back slope	Ramp of 3.6 inches and 5.7° back slope
Run 4	Ramp of 2 ft height and 10° back slope	Ramp of 5.5 inches and 8.68° back slope
Run 5	Ramp of 2 ft height and 6° back slope	Ramp of 5.5 inches and 8.68° back slope
Run 6-1	Ramp of 2 ft height and 10° back slope	Ramp of 6.5 inches and 10.2° back slope
Run 6-2	Ramp of 2 ft height and 10° back slope	Ramp of 7.5 inches and 11.77° back slope
Run 6-3	Ramp of 2 ft height and 10° back slope	Ramp of 8.5 inches and 13.28° back slope
Run 6-4	Ramp of 2 ft height and 10° back slope	Ramp of 10 inches and 15.52° back slope
Run 6-5	Ramp of 2 ft height and 10° back slope	Ramp of 12 inches and 18.43° back slope
Run 7	No inverse slope	Ramp of 7.5 inches and 11.77° back slope

Table 4. Comparison of spillway discharges with and without modifications

Reservoir level (ft)	Original discharge (ft ³ .sec ⁻¹)	Discharge after modifications (ft ³ .sec ⁻¹)	Difference (%)
1242	936,027	937,513	+0.16
1260	1,010,000	1,009,630	-0.036

The original discharge is based on model study in 1967; and modified on the basis of model study in 2004.

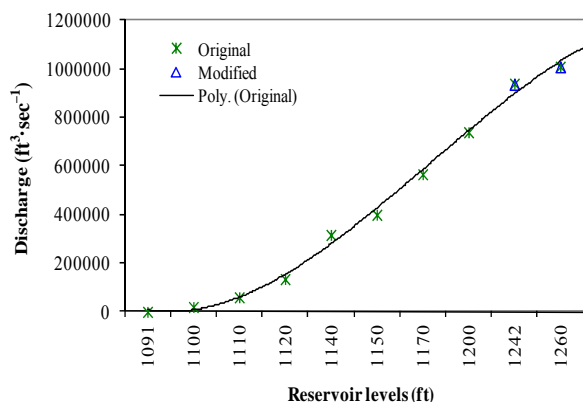


Figure 3. Spillway rating curve with and without modifications.

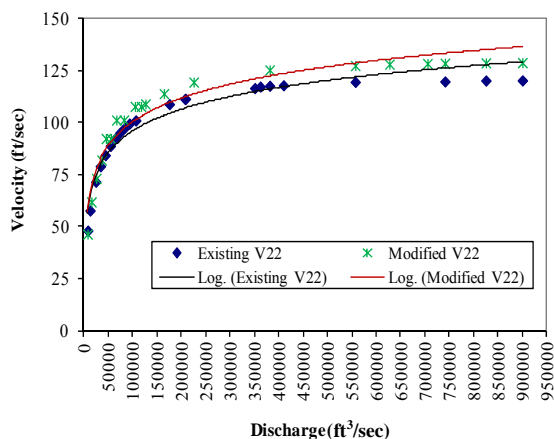


Figure 4. Comparison of chute velocities for existing and modified spillway at 22 ft from crest.

350,000 ft³.sec⁻¹ and flattens down with almost horizontal slope with the further increase in discharge beyond 350,000 ft³.sec⁻¹ (Figure 5). However, the damage potential for modified conditions sharply increases to about 1400 to a discharge of 350,000 ft³.sec⁻¹ and then flattens down afterwards. It also shows that the damage potential for modified conditions is more than double the damage potential under existing condition. Comparing with different cavitation damage levels in Table 1, the damage potential under modified conditions was between major

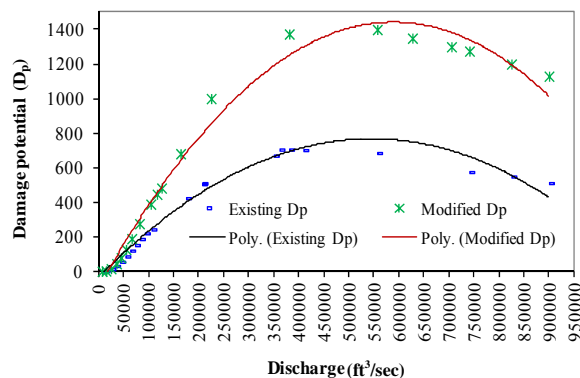


Figure 5. Damage potential in relation to spillway discharges without and with modification scenarios.

and catastrophic levels. Relationship between damage index and spillway discharge also shows relatively higher risks of cavitation in case of modifications (Figure 6). Both analysis for damage potential and damage index infer that proposed modifications are most likely to cause cavitation problem. It necessitated for testing the provision of appropriate aerators to avoid cavitations.

3.3. Optimizing the Aerators

The scale model tested two aerators at sluice gate and end of parabolic chute for modified pool conservation level of 1242 ft (378.6 m). The optimization included two diameters of air supply duct, without ramp and with different configurations of the ramps.

Run 1: Air duct dia 2.25 ft, both aerator without ramp (Base trial)

A pipe of 2.25 ft diameter served as air duct. The model was operated at reservoir conservation level for gate openings varying from 5 to 35 ft. The results with 5 ft gate opening showed low pressure air pocket under the flow jet emerging from the gate and the sluice aerator drew adequate air with hissing noise. Low pressure air cavity was also noted at the chute aerator. At 10 ft gate opening, the length of air pocket was reduced and some back flows were accumulated. Increased flow depth and back flows caused reduction in air supply to sluice and chute aerators. At 15 ft gate opening, further increase in back flows and flow depth reduced the air supply tremendously and the sluice aerator was almost ineffective. Nevertheless, flow jet drew some air on the spillway chute showed sign of poor functioning of the chute aerator. At 20 ft gate opening, piling up of back flow at the tail end of the air duct reduced the air supply to insignificant level and water almost filled the air pocket at the location of chute aerator. The results showed inefficacy of the aerators arrangement in supplying the air. Specifically, the chute aerator was ineffective to supply air to the duct.

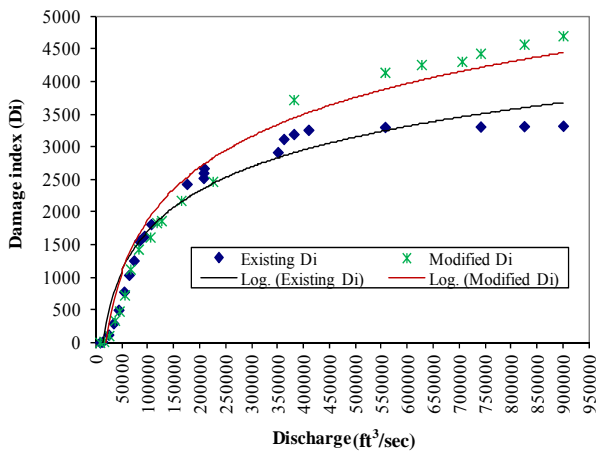


Figure 6. Damage index in relation to spillway discharges without and with modification scenarios.

Run 2: Air duct dia 2.25 ft and chute aerator with ramp of 2.0 ft height & 10° back slope

The chute aerator was modified to improve the air supply by providing a ramp of 2 ft height and a back slope at an angle of 10 degree at the end of raised floor. The model was run at the pool conservation level and the gate opening varied from 5 to 35 ft. The results showed better air flow and longer flow trajectory at the end of raised floor for 5 ft gate opening. At 10 ft gate opening, the length of the air cavity on the chute was reduced, but no back flow was noted. At 15 ft gate opening the size of the air cavity was further reduced, but the air pocket at the end of the raised floor was still effective in drawing the air. At 20 ft gate opening, there was more reduction in air cavity and accumulation of back flows also started. At 25 ft gate opening, accumulation of back flow was increased and the length of flow trajectory tremendously reduced, but the trajectory was still instrumental to pushing some air on the top of the parabolic chute. At 30 ft gate opening, the air cavity at the end of raised floor was almost filled with the back flows. Nevertheless, the modified ramped aerator was still able to draw some air. The results from run 2 showed improved air supply to the parabolic chute as compared with run 1.

Run 3: Air duct dia 3.0 ft and chute aerator with ramp of 2.0 ft height and 10° back slope and sluice ramp of 3.6 inches and 5.7° back slope

In this run, the diameter of the air supply duct was increased from 2.25 ft to 3.0 ft. A ramp of 3.6 inches (back slope 1:10 or 5.7 degree) in the sluice aerator and 2.0 ft in the chute aerator with 10 degree back slope were also provided. The results indicated that the increased pipe diameter enhanced the air supply to the air duct of the sluice aerator at all gate openings. The length of flow trajectory at the end of raised floor was increased from 30 ft with 2.25 ft diameter pipe (run 2) to 33 ft with 3.0 ft diameter pipe at 5 ft gate opening. Further, air suction

limit of the sluice aerator was increased from 10 ft gate opening in case of 2.25 diameter pipe to 12 ft gate opening for 3.0 ft diameter air duct. This proved superiority of 3.0 ft diameter air duct over 2.25 ft diameter air duct. However, it was almost ineffective at gate opening more than 12 ft.

Run 4: Air duct dia 3.0 ft and chute aerator with ramp of 2.0 ft height and 10° back slope and sluice ramp of 5.5 inches and back slope of 8.68° (1:10)

In this run the ramp height of the sluice aerator was increased from 3.6 inches to 5.5 inches increasing the back slope of the ramp from 5.7 to 8.69 degree, when all other features remained same as in case of run 3. The results showed the length of air cavity as 33 ft, when effective gate opening increased from 12 to 16 ft. Raising the ramp height of the sluice gate did not show negative effect on the discharge rating of the spillway.

Run 5: Air duct dia 3.0 ft and chute aerator with ramp of 2.0 ft height and 6° back slope and sluice ramp of 5.5 inches and back slope of 8.68°)

In run 5, the ramp slope of the chute aerator was changed from 10 to 6 degree with horizontal, when all other features remained same as in case of run 3. The results of this run for same set of flow conditions showed remarked reduction in the length of air cavity as compared with ramp slope of 10 degree (Table 5). The results showed disadvantages of changing the ramp slope; therefore, further tests were not conducted with 6 degree ramp slope and the 10 degree ramp slope was found more suitable (Run 4). This indicated that the performance of chute aerator was at maximum for parameters set in run 4. Therefore, further simulations focused to improve the performance of the sluice aerator, keeping other parameters constant.

Run 6: Optimizing the ramp of sluice aerator, when keeping the air duct dia 3.0 ft and chute aerator with ramp of 2.0 ft height and 10° back slope

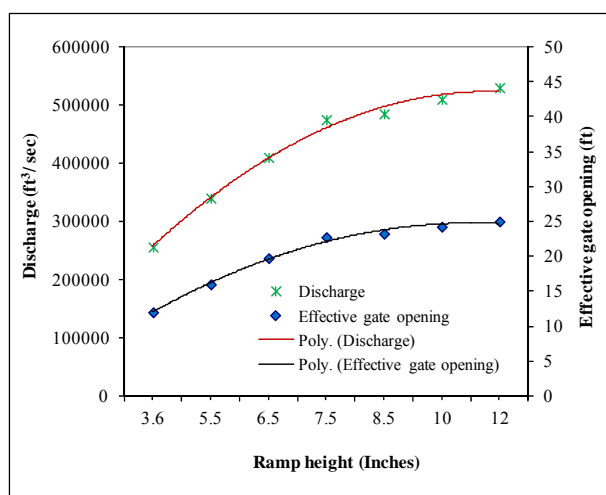
The simulation from run 1 to run 5 revealed that increase in ramp height of the sluice aerator from 3.6 inches to 5.5 inches improved the effective gate opening from 12 to 16 ft. It showed potential to further manure it. Therefore, a number of simulation runs were made by increasing the ramp height to 6.5, 7.5, 8.5, 10 and 12 inches without changing the base length of 3.0 ft. The results of these simulations are given in Table 6. Relationship between the ramp height, effective gate opening and discharge is in Figure 7.

Table 5. Comparison of air cavity for different ramp slopes at the chute.

Gate opening (ft)	Length of air cavity (ft)	
	10 degree slope	6 degree slope
5	131	93
10	143	100

Table 6. Results of optimization of the ramp height of the sluice aerator.

Ramp height (inches)	Angle (Degree)	Observations on model
6.5	10.23	<ul style="list-style-type: none"> - Cavity length immediate below the spillway gates was increased from 40 ft for 5.5 inch ramp to 54 ft with 6.5 inch ramp. - Effective gate opening at which the aerator sucked the air was increased from 16.0 to 19.75 ft. - The aerator submerged and became ineffective at 20 ft gate opening. - The change in ramp height did not affect the maximum discharge outflow at the highest pool level of 1260.
7.5	11.77	<ul style="list-style-type: none"> - Cavity length downstream of spillway gates was increased 62 ft. - Effective gate opening for air sucking increased to 22.75 ft, which can release a discharge of $475,000 \text{ ft}^3 \cdot \text{sec}^{-1}$ at conservation pool level of 1242 ft. - The change in ramp height did not affect the maximum discharge outflow at the highest pool level of 1260.
8.5	13.28	<ul style="list-style-type: none"> - No significant improvement noted when effective gate opening changed from 22.75 to 23.25 ft.
10.0	15.52	<ul style="list-style-type: none"> - Cavity length downstream of spillway gates was increased 67 ft. - Effective gate opening for air sucking increased to 24.25 ft, which can release a discharge of $510,000 \text{ ft}^3 \cdot \text{sec}^{-1}$ at conservation pool level of 1242 ft. - Increased back flow along the bed caused pulsation of the flow jet in the sluice bays. It adversely affected the discharging capacity of the spillway.
12.0	18.43	<ul style="list-style-type: none"> - The flow jet landed on 2 ft high ramp at the end of the chute aerator resulting in high splashes. Pulsating of the flow jet was increased. Outflow discharge capacity of the spillway reduced by $7756 \text{ ft}^3 \cdot \text{sec}^{-1}$. Therefore, it was not acceptable scenario.

**Figure 7. Optimization of ramp height of the sluice aerator in relation to spillway discharge and effective gate opening (Air duct 3.0 ft diameter).**

The observations on the scale model have shown that an increase in sluice ramp height increased the limit of effective gate opening. Flow conditions in the sluice bays within the piers remained smooth and stable to ramp height of 7.5 inches. Pulsation of flow jet started at ramp height of 8.5 inches and above. For 5 ft gate opening and 10 inches ramp height, the flow jet landed on the slope of 2.0 ft high ramp at chute aerator and increased splashing. The ramp height of 10 inches increased the heaving and pulsating in the headworks bays and reduced the discharging capacity of the spillway. However, 12 inches

ramp was worse in function and reduced the spillway discharging capacity by $7756 \text{ ft}^3 \cdot \text{sec}^{-1}$ at maximum reservoir level. The above discussion reveals that a sluice ramp of 7.5 inches with an angle of 11.77° performed better of all the scenarios and appears to be the appropriate ramp height for sluice aerator.

Run 7: Sluice aerator with inverse slope eliminated

Elimination of inverse slope (1:20) and provision of horizontal floor at downstream of sluice aerator at an elevation of 1091 ft, with all other optimized parameters resulted in increased cavity length, but decreased cavity depth, small improvement in effective gate opening and non-uniform distribution of sucked air along full width of the bay. It indicates that inverse slope performed better in cavity depth and is instrumental in uniform air distribution along the bay width.

4. Conclusions

- Five feet rise in the bed of the headworks bay from 1086 to 1091 ft effectively restricted the maximum spillway discharge to its original design capacity limit of $1.01 \text{ million ft}^3 \cdot \text{sec}^{-1}$ at the maximum reservoir level of 1260 ft. This rise did not significantly change the flow conditions of the spillway.
- Mathematical model study depicted high cavitation risks and damage potential for modified spillway and showed a need for introduction of aerators to avoid cavitations.
- Scale model study indicated that a chute aerator of 2.0 ft height and an angle of 10° was highly effective in

inducing air over the parabolic chute up to gate openings of 25 ft. However, the air suction was reduced at the gate opening of more than 25 ft.

Among the several ramp heights and slope of the sluice aerator, an aerator with ramp height of 7.5 inches performed best of all. It did not negatively affect the spillway discharging capacity at the conservation level of 1242 ft and maximum reservoir level of 1260 ft. The sluice aerator with less ramp height (3.6 and 5.5 inches) failed to lift the flow jet and submerged at 10 ft gate opening and above. On the other hand high ramp height for example 10 and 12 inches increased the heaving and pulsation in the bay and reduced its discharging capacity significantly. It revealed that 7.5 inches was the optimum ramp height for the sluice aerator.

5. Acknowledgements

The authors acknowledge the technical support by Mangla Joint Venture-Mangla Dam Raising Project, Pakistan, assistance by the technical staff of the Hydraulic Research Station Nandi Pur and financial support by the Water and Power Development Authority, Pakistan.

REFERENCES

- [1] H. T. Falvey, "Cavitation in Chutes and Spillways," *Engineering Monograph No. 42*, A Water Resources Technical Publication, United State Department of Interior, Bureau of Reclamation, Denver, 1990.
- [2] H. Chanson, "Air Bubble Entrainment in Free-Surface Turbulent Shear Flows," Academic Press, London, 1997, 401 p.
- [3] M. Brocchini and D. H. Peregrine, "The Dynamics of Strong Turbulence at Free Surface. Part 1. Description," *Journal of Fluid Mechanics*, Vol. 449, 2001, pp. 225-254. [doi:10.1017/S0022112001006012](https://doi.org/10.1017/S0022112001006012)
- [4] D. Colgate, "Hydraulic Model Studies of Amaluza Dam Spillway," *US Bureau of Reclamation Report No. GR-25-76*, 1976.
- [5] A. J. Paterka, "The Effect of Entrained Air on Cavitation Pitting," *Proceedings of the Joint Meeting of the International Association for Hydraulic Research*, American Society of Civil Engineers, Minneapolis, 1953.
- [6] V. M. Semenkoy and L. D. Lentyaev, "Spillway with Nappe Aeration," In: H. T. Falvey, *Cavitation in Chutes and Spillways*, *Engineering Monograph No. 42*, A Water Resources Technical Publication, United State Department of Interior (USBR), Bureau of Reclamation, Denver, 1973.
- [7] D. Colgate and R. Elder, "Design Considerations Regarding Cavitation in Hydraulic Structures," *Proceedings of 10th Hydraulic Division Conference of American Society of Civil Engineers*, Urbana, 16-18 August 1961.
- [8] Borden, D. Colgate, J. Legas and C.E. Selander, "Documentation of Operation, Damage, Repair and Testing of Yellowtail Dam Spillway," *US Bureau of Reclamation Report REC-ERC-71-23*, 1971, 76 p.
- [9] K. Kramer, "Development of Aerated Chute Flow," *Doctoral Thesis ETH No 15428*, Technical University of Darmstadt, Dipl-Ing, 2006.
- [10] National Engineering Services Pakistan (NESPAK), Associated Consulting Engineers (ACE), Barqaab Consulting Services (BCS), Binnie, Black and Veatch, UK (BBV), MWH Americas Inc., "Sedimentation Studies of Mangla Dam Raising Project," Vol. 1. Project Report Water and Power Development Authority (WAPDA), Pakistan, 2004.
- [11] F. M. Henderson, "Open Channel Flow," MacMillan Company, New York, 1966.
- [12] P. Novak and J. Cabelka, "Models in Hydraulic Engineering, Physical Principles and Design Applications," Pitman Publication, London, 1981.
- [13] M. Takahashi, C. A. Gonazalez and H. Chanson, "Self-Aeration and Turbulence in a Stepped Channel: Influence of Cavity Surface Roughness," *International Journal of Multiphase Flow*, Vol. 32, No. 12, 2006, pp. 1370-1385. [doi:10.1016/j.ijmultiphaseflow.2006.07.001](https://doi.org/10.1016/j.ijmultiphaseflow.2006.07.001)