

Characteristics of Filtered Neutron Beam Energy Spectra at Dalat Reactor

Tran Tuan Anh¹, Pham Ngoc Son¹, Vuong Huu Tan², Pham Dinh Khang¹, Phu Chi Hoa³

¹Nuclear Research Institute, Dalat, Vietnam

²Vietnam Agency for Radiation and Nuclear Safety, Hanoi, Vietnam

³The University of Dalat, Dalat, Vietnam

Email: pnsn.nri@gmail.com

Received 9 January 2014; revised 11 February 2014; accepted 6 March 2014

Copyright © 2014 by authors and Scientific Research Publishing Inc.

This work is licensed under the Creative Commons Attribution International License (CC BY).

<http://creativecommons.org/licenses/by/4.0/>



Open Access

Abstract

Filtered neutron technique was applied for producing quasi-monoenergetic neutron beams of 24 keV, 54 keV, 133 keV and 148 keV at the horizontal neutron channel No. 4 of the Dalat Nuclear Research Reactor. The study on physical characteristics of these beam lines has been carried out for efficient applications in neutron capture experiments. The filtered neutron spectrum of each beam has been simulated by Monte-Carlo method and experimentally measured by a gas-filled protonrecoil spectrometer. The neutron fluxes of these filtered beams were measured by the activation technique with standard foils of ¹⁹⁷Au, using a high efficient HPGe digital gamma-ray spectrometer.

Keywords

Neutron Filter, Proton-Recoil

1. Introduction

The neutron transmission neutron filters technique [1] has been successfully applied to produce quasi-monoenergetic neutrons for basic research and application. Some advantage uses of reactor based filtered beams can be listed as neutron total and capture reaction cross section measurements, calibration of neutron detector, prompt gamma-ray neutron activation analysis (PGNAA) and Boron neutron capture therapy (BNCT).

The Dalat research reactor (DRR), was originally a TRIGA MARK II reactor with a nominal power of 250 kW completed construction and reached critical state in 1963. The reactor then has been upgraded to nominal power of 500 kW since 1984. There are three radial and one tangential neutron beam ports at DRR, each of which penetrates the concrete shield structure and the reactor water to provide external beams of neutron origin-

nated from reactor core [2]. The filtered neutron technique has been introduced at the horizontal channel No. 4 in order to create mono-energetic neutron beams of thermal, 24 keV, 54 keV, 59 keV, 133 keV and 148 keV. These filtered neutron beams have been used for implementation of neutron total and radiative capture reaction cross sections measurements, and elemental analysis with PGNA method.

2. Filtered Neutron Spectrum Calculations

The phenomenon of neutron filtration is conditioned by existence in the total neutron cross sections for some atomic nuclei of deep minimums which are the result of interference between the coherent waves of resonance and potential neutron scattering in these nuclei. Therefore, the white neutron spectrum from reactor transmitted such filter components becomes mono-energetic neutrons [1]. The neutron spectrum can be calculated by the following expressions:

$$\Phi(E) = \Phi_0(E) * \exp\left(-\sum_k \rho_k d_k \sigma_i(E)\right), \quad (1)$$

$$I = \frac{\int_{E_l}^{E_h} \Phi(E) dE}{\int_0^{\infty} \Phi(E) dE} \quad (2)$$

where $\Phi_0(E)$ and $\Phi(E)$ are the energy dependent neutron spectra before and after neutron filters; ρ_k , d_k and $\sigma_i(E)$ are the density, length and total cross section of k^{th} filter component; I is the relative intensity of the main energy filtered neutron beam [3]. For pre-computation of filtered neutron spectrum with the expression (1) and (2), a computer code named CFNB (Calculation for Filtered Neutron Beams) has been developed for calculation of transmission neutron spectra after filter components. This computer code was evaluated by making comparisons of calculated neutron spectra with corresponding results from Monte-Carlo simulation used the MCNP5 code [4]. The comparison results present relatively agreement between the two calculation methods within statistical uncertainties. The calculated characteristic parameters of dominant neutron energy, resolution, peak neutron flux, and filter materials corresponding for each beam of 24 keV, 54 keV, 133 keV and 148 keV are given in **Table 1**. The results of computed neutron spectra are shown in **Figures 1-4**.

3. Filtered Neutron Spectrum Measurements

The filter components given in **Table 1** were successively installed into the horizontal channel No. 4 of the Dalt research reactor, and the corresponding tailored neutron energy spectra of 24 keV, 54 keV, 133 keV and 148 keV beams were measured by using a proton-recoil proportional spectrometer. The measured proton-recoil pulse-high response functions were subtracted by background spectrum which was determined by intercepting the neutron beam with a 10 cm long polyethylene mixed B₄C absorber. For mono-energetic neutrons of energy, $E_n < 10$ MeV, the recoil-proton response function has a uniform energy distribution. The probability that a recoil-proton will have energies between E_p and $E_p + dE_p$ can be evaluated with the following equation [5].

Table 1. Calculated characteristics of the filtered neutron beams.

E_n (keV)	ΔE_n (keV)	MCNP		CFNB		Filter components
		Flux $\times 10^5$ (n·cm ⁻² ·s ⁻¹)	I (%)	Flux $\times 10^5$ (n·cm ⁻² ·s ⁻¹)	I (%)	
24	1.8	6.2 \pm 0.02	98.3	6.2	96.7	0.2 g/cm ² ¹⁰ B + 20 cm Fe + 30 cm Al + 35 g/cm ² S
54	1.5	6.9 \pm 0.01	76.9	6.8	78.1	0.2 g/cm ² ¹⁰ B + 98 cm Si + 35 g/cm ² S
133	2.7	3.3 \pm 0.01	92.9	3.1	92.3	0.2 g/cm ² ¹⁰ B + 50 g/cm ² Cr + 10 cm Ni + 60 cm Si
148	14.8	40.5 \pm 0.03	94.6	41.2	95.8	0.2 g/cm ² ¹⁰ B + 98 cm Si + 1 cm Ti

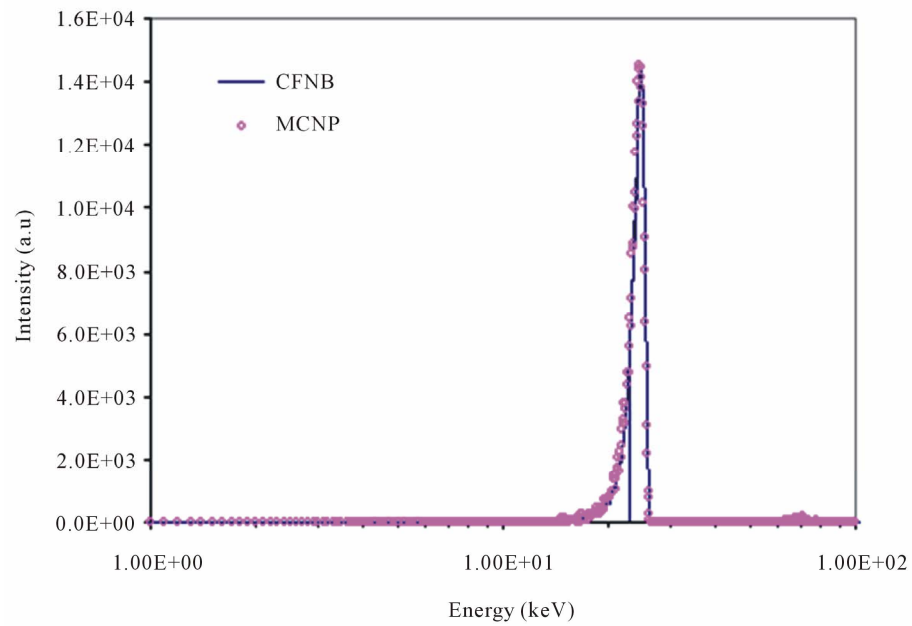


Figure 1. Calculated neutron spectrum of 24 keV.

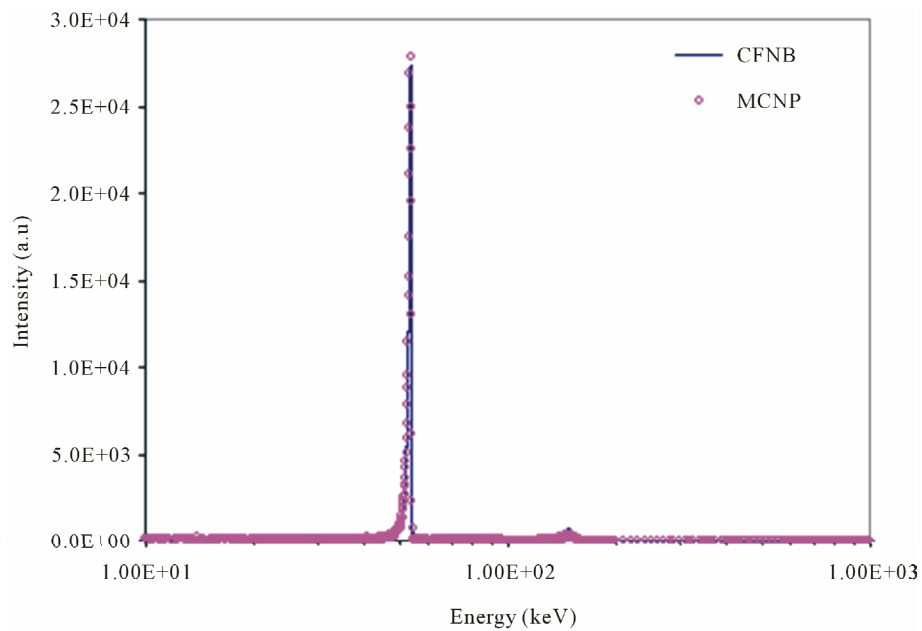


Figure 2. Calculated neutron spectrum of 54 keV.

$$f(E_p)dE_p = \begin{cases} \frac{dE_p}{E_n} & 0 \leq E_p \leq E_n \\ 0 & E_p > E_n \end{cases} \quad (3)$$

Therefore, the response of a proton-recoil counter has a rectangular shape. This simple shape makes it relatively easy to determine the neutron-energy spectrum using the slope of the recoiled proton energy distribution. The proton-recoil response function $f(E_p)$ is related to the neutron energy spectrum $\Phi(E)$ as the following differential equation [5]:

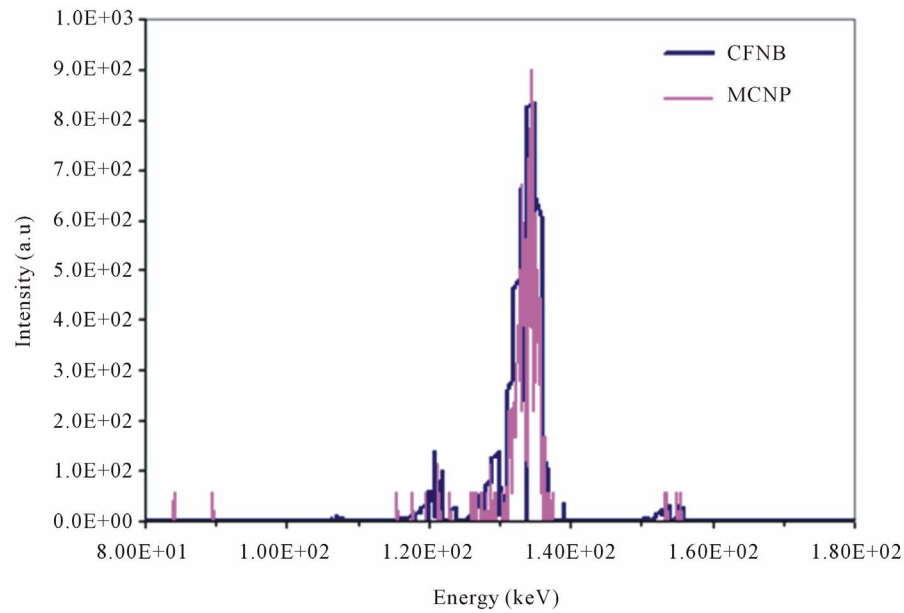


Figure 3. Calculated neutron spectrum of 133 keV.

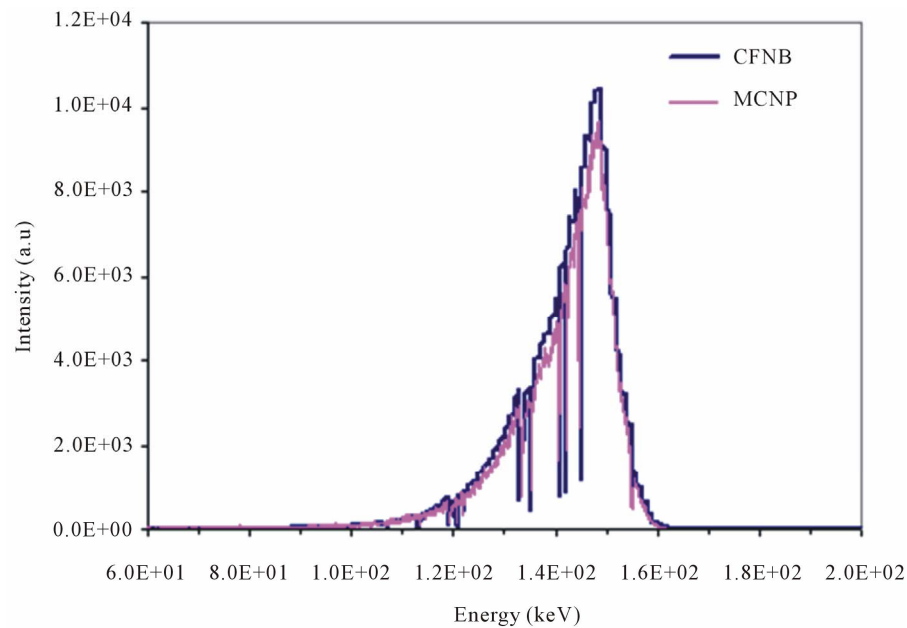


Figure 4. Calculated neutron spectrum of 148 keV.

$$\Phi(E_n) = -\frac{1}{NT} \frac{E_n}{\sigma(E_n)} \left. \frac{df(E_p)}{dE_p} \right|_{E_p=E_n} \quad (4)$$

where $\sigma(E_n)$ is the neutron-proton scattering cross section; N is the number of the hydrogen atom in the effective counter volume; and T is the measuring time. Thus, the neutron spectrum $\Phi(E)$ would be derived from the differential function of the measured proton-recoil data $f(E_p)$. The proton-recoil proportional spectrometer used in these measurements is consisting of a proton-recoil counter model LND-281 (gas filling: N + CH₄ + N₂; pressure of 3240 Torr), a preamplifier model PC-142 Ortec, and a CANBERRA multiport-MCA Genie-2000 multi-channel analyzer. The measured proton-recoil response function for the 24 keV filtered neutron

beam and background spectrum are shown in **Figure 5**.

4. Results and Discussion

The characteristic parameters of neutron energy spectrum, relative intensity, and filter materials have been studied for the 24 keV, 54 keV, 133 keV and 148 keV filtered neutron beams at the Dalat research reactor. The energy distributions of tailored neutrons were calculated and normalized by transmission and Monte-Carlo methods, in order for optimal selection of filter materials in a practical limited condition of financial support. The calculations code CFNB is also developed and validated for user to evaluate the relative intensity of the expected filtered neutrons and the impurity neutrons. The absolute neutron flux at sample position was measured by activation method with standard foil of ^{197}Au in a 1 mm thick Cd cover. The measured values of flux were 6.1×10^5 , 6.7×10^5 , 3.2×10^5 , 3.9×10^6 n/cm²/s for the 24, 54, 133 and 148 keV neutron beams, respectively. The results of experimental neutron fluxes are consistent with calculated values, within statistical uncertainties. The proton-recoil response functions and differential neutron spectra of 54, 133 and 148 keV filtered neutron beams are shown in **Figures 6-8**.

5. Conclusion

The study on determination of characteristic parameters has been performed for filtered neutron beams at the

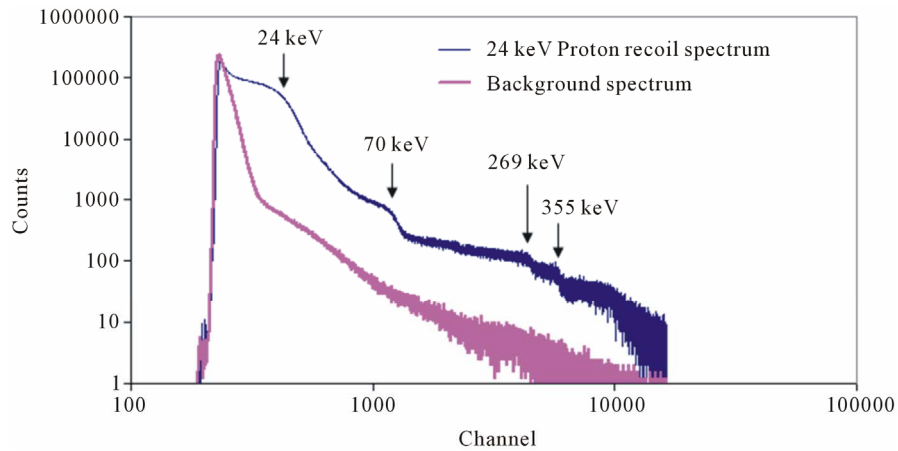


Figure 5. The proton-recoil response function of the 24 keV filtered neutron beam.

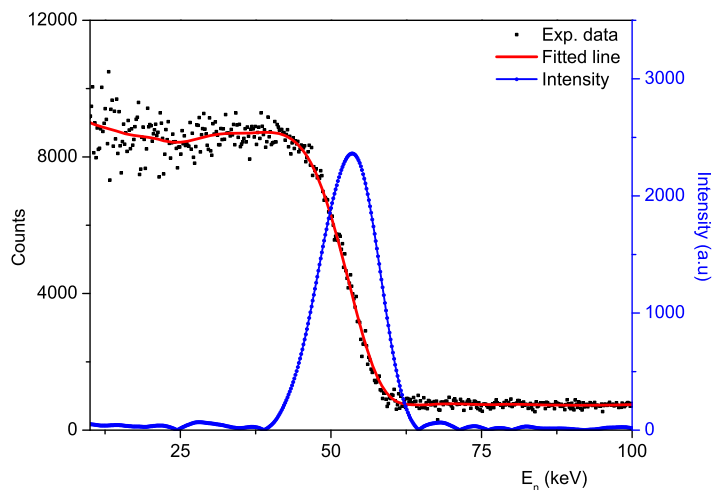


Figure 6. The differential neutron energy spectrum of the 54 keV filtered neutron beam.

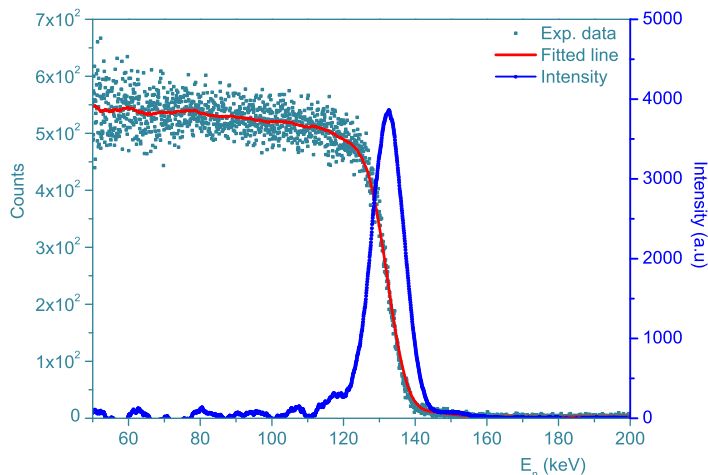


Figure 7. The differential neutron energy spectrum of the 133 keV filtered neutron beam.

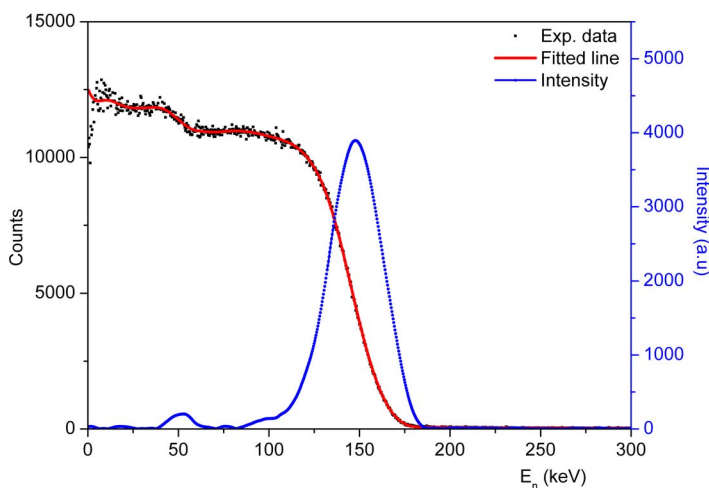


Figure 8. The differential neutron energy spectrum of the 148 keV filtered neutron beam.

horizontal channel No. 4 of Dalat research reactor. The neutron filter technique has been effectively applied to providing mono-energetic neutron beam lines with qualified characteristics for basic research and related applications at the Dalat Nuclear Research Institute. These neutron beams can be used as mono-energetic neutron sources for measurements of neutron capture and total reaction cross sections. The applications of these mono-energetic neutron beams are also proposed for energy dependent calibration of neutron detectors.

Acknowledgements

The authors are grateful to the director board of Dalat Nuclear Research Institute for their great encouragement and helpful in creating an advantage research condition. This research is funded by Vietnam National Foundation for Science and Technology Development (NAFOSTED) under grant number “103.04-2012.59”.

References

[1] Simpson, O.D. and Miller, L.G. (1968) A Technique to Measure Neutron cross Sections in the Low keV Energy Region. *Nuclear Instruments and Methods*, **61**, 245-250. [http://dx.doi.org/10.1016/0029-554X\(68\)90236-X](http://dx.doi.org/10.1016/0029-554X(68)90236-X)
 [2] General Atomic (1961) TRIGA Mark II Reactor General Specifications and Description. GA-2627, Division of General Dynamics, USA.

- [3] Gritzay, O.O., Kolotyi, V.V. and Kaltchenko, O.I. (2001) Neutron Filters at Kyiv Research Reactor. National Academy of Sciences of Ukraine, Institute for Nuclear Research, Preprint KINR-01-6, Kiev.
- [4] X-5 Monte Carlo Team (2005) MCNP—A General N-Particle Transport Code, Version 5. Volume I: Overview and Theory, LA-UR-03-1987, Los Alamos National Laboratory, USA.
- [5] Verbinski, V.V. and Giovanni, R. (1974) Proportional Counter Characteristics and Applications to Reactor Neutron Spectrometry. *Nuclear Instruments and Methods*, **114**, 205-231. [http://dx.doi.org/10.1016/0029-554X\(74\)90536-9](http://dx.doi.org/10.1016/0029-554X(74)90536-9)